



By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)



Journals

Books

Conferences

EDPS Account

**MATEC** Web of Conferences[All issues](#)   [Series](#)  
[Forthcoming](#)   [About](#)

Search   Menu

[All issues](#) ▶ Volume 147 (2018)[◀ Previous issue](#)[Table of Contents](#)[Next issue ▶](#)**Free Access** to the whole issue

## MATEC Web of Conferences

Volume 147 (2018)

### The Third International Conference on Sustainable Infrastructure and Built Environment (SIBE 2017)

Bandung, Indonesia, September 26-27, 2017

D. Roosmini, K. Pribadi, B. Sugeng and I.K. Hadihardaja (Eds.)

Export the citation of the selected articles [Export](#)

[Select all](#)

[Open Access](#)

Statement of Peer review

Published online: 22 January 2018

PDF (163 KB)

[Open Access](#)

About the conference

Published online: 22 January 2018

PDF (9.07 KB)

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

- [Transportation System and Engineering](#)
- [Water Resources Engineering and Management](#)
- [Water and Waste Engineering and Management](#)
- [Construction Management](#)
- [Geotechnical Engineering](#)
- [Environmental Protection and Management](#)

☐ [Open Access](#)

Preface 00001

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814700001>

PDF (60.2 KB)

## - *Structure and Material*

☐ [Open Access](#)

Numerical Analysis Of Viscous Wall Dampers On Steel Frame 01001

Effy Hidayaty, Herlien D. Setio, Adang Surahman and Muslinang Moestopo

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701001>

PDF (643 KB) | [References](#)

☐ [Open Access](#)

On the accuracy and convergence of the hybrid FE-meshfree Q4-CNS element in surface fitting problems 01002

Foek Tjong Wong, Richo Soetanto and Januar Budiman

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701002>

PDF (472 KB) | [References](#)

OK

☐ [Open Access](#)

Implementation of Highly-Flowable Strain Hardening Fiber Reinforced Concrete in New RC Beam-Column Joints 01003

Wen-Cheng Liao and Wei-Ru Su

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701003>

PDF (671 KB) | [References](#)

☐ [Open Access](#)

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Herwani, Ivindra Pane, Iswandi Imran and Bambang Budiono

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701004>

PDF (382 KB) | [References](#)

☐ [Open Access](#)

Shear Stress Distribution in the Opening Chords of Hybrid R/C T-Beams with Opening  
01005

Jonie Tanijaya

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701005>

PDF (541 KB) | [References](#)

☐ [Open Access](#)

Effect of Pressure and Heat Treatments on the Compressive Strength of Reactive  
Powder Concrete 01006

Masdar Helmi, Matthew R Hall and Sean P Rigby

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701006>

PDF (777 KB) | [References](#)

☐ [Open Access](#)

Physical, chemical, and mineralogical characteristics of blast furnace slag on durability  
of concrete 01007

Elakneswaran Yogarajah, Toyoharu Nawa and Toshifumi Igarashi

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701007>

PDF (400 KB) | [References](#)

OK

☐ [Open Access](#)

The use of hazardous sludge solidification and green-lipped mussel shells in  
cementitious material: a case study of ngcc power plant of priok 01008

Samuel Dwima Halim, Edbert Rainer, Chris Ryantonius, Bagas Panandito, Doni Wardoyo,

Mhd Reza Fahlevy and Ivan Sandi Darma

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814701008>

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

## - *Transportation System and Engineering*

- ☐ [Open Access](#)  
Performance level analyses of public transportation using importance-performance analysis method 02001  
Nursyamsu Hidayat  
Published online: 22 January 2018  
DOI: <https://doi.org/10.1051/mateconf/201814702001>  
[PDF \(383.8 KB\)](#) | [References](#)
- 
- ☐ [Open Access](#)  
Exploring physical attributes of walkability from perspective of blind pedestrians 02002  
Russ Bona Frazila and Febri Zukhruf  
Published online: 22 January 2018  
DOI: <https://doi.org/10.1051/mateconf/201814702002>  
[PDF \(338 KB\)](#) | [References](#)
- 
- ☐ [Open Access](#)  
Is the Indonesian regulation of standard level of service of a pedestrian path fulfill pedestrians' convenience 02003  
Amirotul Mahmudah, Slamet Legowo, Agus Sumarsono, Studyamadyakomunika Linta and Benny Irawan  
Published online: 22 January 2018  
DOI: <https://doi.org/10.1051/mateconf/201814702003>  
[PDF \(427 KB\)](#) | [References](#)
- 
- ☐ [Open Access](#)  
Relationship between train users' perceptions of walkability with access and egress mode choice 02004  
Romeiza Syafriharti, B. Kombaitan, Iwan P. Kusumantoro and Ibnu Syabri  
Published online: 22 January 2018  
DOI: <https://doi.org/10.1051/mateconf/201814702004>  
[PDF \(391 KB\)](#) | [References](#)
- 
- ☐ [Open Access](#)  
Model petri net of adaptive traffic lights and its collaboration with a special event 02005  
Tomi Tristono, Setiyo Daru Cahyono, Sutomo and Pradityo Utomo

[OK](#)

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

PDF (868 KB) | References

☐ Open Access

The analysis of overloaded trucks in indonesia based on weigh in motion data (east of sumatera national road case study) 02006

Jongga Jihanny, Bambang Sugeng Subagio and Eri Susanto Hariyadi

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814702006>

PDF (809.8 KB) | References

☐ Open Access

Application of gis on determination of flood prone areas and critical arterial road network by using chaid method in bandung area 02007

Darwin, Benecditus Kombaitan, Gatot Yudoko and Heru Purboyo

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814702007>

PDF (1.81 MB) | References

☐ Open Access

Porous concrete basic property criteria as rigid pavement base layer in indonesia 02008

Frisky Ridwan Aldila Melania Care, Bambang Sugeng Subagio and Harmein Rahman

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814702008>

PDF (675.5 KB) | References

OK

☐ Open Access

Pedestrian Perception about Facility of Pedestrian Crossings 02009

Agah Muhammad Mulyadi

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814702009>

PDF (553 KB) | References

## - *Water Resources Engineering and Management*

☐ Open Access

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703001>

PDF (283 KB) | [References](#)

☐ [Open Access](#)

Erosion index formulation with respect to reservoir life in the upper Citarum watershed 03002

Bakhtiar

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703002>

PDF (641 KB) | [References](#)

☐ [Open Access](#)

Development Land Erosion Model Using Model Builder GIS (Case Study: Citepus Watershed) 03003

Dina PA Hidayat and Sih Andajani

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703003>

PDF (594 KB) | [References](#)

☐ [Open Access](#)

Study of the Relation between Sediment Characteristics and Multiphase Flow to the Presence of Sediment Oxygen Demand (SOD) in Open Channels 03004 OK

Dhimas Dwinandha and Haryo Satriyo Tomo

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703004>

PDF (503.1 KB) | [References](#)

☐ [Open Access](#)

The Performance of Equalization Model of Water Allocation Inter Irrigation Areas in River System 03005

Anang M. Farriansyah, Pitojo Tri Juwono, Ery Suhartanto, Very Dermawan and Rahimatus S. Z. Alyaminy

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703005>

PDF (1.13 MB) | [References](#)

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

## Diversion Canal to Decrease Flooding (Case Study : Kebon Jati-Kalibata Segment, Ciliwung River Basin) 03006

Dian Indrawati, Iwan K. Hadihardaja, M. Bagus Adityawan, Syambali F. Pahrizal and Fajar Taufik

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703006>

PDF (897 KB) | [References](#)

☐ [Open Access](#)

## Hydraulic and Groundwater Chemical Parameters of the Aquifer in Malakasari, Bandung 03007

Jemi S. Ahnaf, Zufaldi Zakaria and Aton Patonah

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703007>

PDF (350 KB) | [References](#)

☐ [Open Access](#)

## Study on the Effectiveness of Infiltration Wells to Reduce Excess Surface Run Off In ITB 03008

Afifah Muhsinatu Mardiah, Cherish Nurul Ainy, Mohammad Bagus and Dhemi Harlan

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703008>

PDF (481 KB) | [References](#)

OK

☐ [Open Access](#)

## 2D Modeling of Flood Propagation due to the Failure of Way Ela Natural Dam 03009

Bagus Pramono Yakti, Mohammad Bagus Adityawan, Mohammad Farid, Yadi Suryadi, Joko Nugroho and Iwan Kridasantausa Hadihardaja

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703009>

PDF (976 KB) | [References](#)

☐ [Open Access](#)

## Study on Water Resources Allocation for Kertajati, Jatitujuh, and Ligung Sub-Districts to Support the Development of West Java International Airport (BIJB) and Kertajati Aerocity Area 03010

Yadi Suryadi, Asrini Chrysanti, Febya Nurnadiati, Mohammad Bagus Adityawan and Arno Adi Kuntoro

Published online: 22 January 2018



By using this website, you agree that EDP Sciences may store web audience measurement cookies and, on some pages, cookies from social networks. [More information and setup](#)

☐ Open Access

### Application of Finite Difference Schemes to 1D St. Venant for Simulating Weir Overflow 03011

Nur Lely Hardianti Zendrato, Asrini Chrysanti, Bagus Pramono Yakti, Mohammad Bagus Adityawan, Widyaningtias and Yadi Suryadi

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703011>

PDF (579.9 KB) | [References](#)

☐ Open Access

### 3D Numerical Modeling of Flow in Sedimentation Basin 03012

Dhemi Harlan, Dantje K. Natakusumah, Mohammad Bagus Adityawan, Hernawan Mahfudz and Fitra Adinata

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703012>

PDF (851.1 KB) | [References](#)

☐ Open Access

### The Diurnal and Semidiurnal Patterns of Rainfall and its Correlation to the Stream Flow Characteristic in the Ciliwung Watershed, West Java, Indonesia 03013

Edi Riawan, Tri Wahyu Hadi, Hadi Kardhana, Dadang K. Mihardja and Benyamin Sapiie

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703013>

PDF (734 KB) | [References](#)

OK

☐ Open Access

### Effective real-time forecasting of inundation maps for early warning systems during typhoons 03014

Jhih-Huang Wang, Gwo-Fong Lin and Bing-Chen Jhong

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814703014>

PDF (457 KB) | [References](#)

☐ Open Access

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Mariana Marselina, Arwin Sabar, Indah R S Salami and Dyah Marganingrum

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814703015>

PDF (694 KB) | [References](#)

## **- Water and Waste Engineering and Management**

☐ [Open Access](#)

Development of audit technology approach for performance improvement of faecal sludge treatment plant (IPLT) (Case study: IPLT Bawang in Tangerang City and IPLT Pecuk in Indramayu District) 04001

Rydha Riyana Agustien, Prayatni Soewondo and Arief Sudradjat

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814704001>

PDF (348 KB) | [References](#)

☐ [Open Access](#)

Analysis of Drinking Water Supply System Improvement Using Fuzzy AHP(Case Study: Subang Local Water Company) 04002

Satrio Budi Prakoso and Suprihanto Notodarmojo

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814704002>

PDF (2.10 MB) | [References](#)

OK

☐ [Open Access](#)

Screening The Effect of Cu, Mn, and Mg on Ethanol Formation in Degradation Process of Palm Oil Mill Effluent (POME) under Anaerobic Condition Using Two-Level Factorial Design Method 04003

Tia Widya Puteri and Mindriany Syafila

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814704003>

PDF (505 KB) | [References](#)

☐ [Open Access](#)

Kinetics of nutrient removal in an on-site domestic wastewater treatment facility 04004

Va Vandith, Ahmad Soleh Setiyawan, Prayatni Soewondo, Pom Bophann and Hardjono

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

PDF (372 KB) | References

☐ Open Access

### Control of pH of retained water in the coastal waste disposal site 04005

Ramrav Hem, Tomohiro Yamasaki and Hiroko Sumida

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814704005>

PDF (701 KB) | References

☐ Open Access

### Leachate Treatment from Sarimukti Landfill Using Ozone with Sludge from Water Treatment Plant as a Catalyst 04006

Muhammad Yudha Ramdhani, M. Rangga Sururi and Siti Ainun

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814704006>

PDF (365 KB) | References

☐ Open Access

### Removal of Copper (II) Ions in Aqueous Solutions by Sorption onto Alkali Activated Fly Ash 04007

Lita Darmayanti, Suprihanto Notodarmodjo, Enri Damanhuri and Rino R Mukti

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814704007>

PDF (443 KB) | References

OK

☐ Open Access

### Effect of Aeration Rates on Removals of Organic Carbon and Nitrogen in Small Onsite Wastewater Treatment System (*Johkasou*) 04008

Joni Aldilla Fajri, Tomonari Fujisawa, Yenni Trianda, Yasushi Ishiguro, Guangyu Cui, Fusheng Li and Toshiro Yamada

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/matecconf/201814704008>

PDF (520.4 KB) | References

☐ Open Access

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Nadya Humaira and Emenda Sembiring

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814704009>

PDF (610 KB) | [References](#)

☐ [Open Access](#)

Study on the leaching performance of chromium (Cr) and cadmium (Cd) from the utilization of solidified nickel slag as concrete floors 04010

Maryam Dewiandratika, Sukandar and M. Tafdhila El Akmam

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814704010>

PDF (314.0 KB) | [References](#)

☐ [Open Access](#)

The Treatment of Used Reagent Glass Bottles Using Solidification Technology 04011

Anggun Farida, Iwan Juwana and Hazairin

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814704011>

PDF (408.7 KB) | [References](#)

## - *Ocean and Marine Engineering*

☐ [Open Access](#)

Analysis of ocean wave characteristic in Western Indonesian Seas using wave spectrum model 05001

Rima Rachmayani, Nining Sari Ningsih, Hani Ramadhan and Suliskania Nurfitri

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705001>

PDF (2.86 MB) | [References](#)

OK

☐ [Open Access](#)

Development of Risk-Reliability Based Underwater Inspection for Fixed Offshore Platforms in Indonesia 05002

Ricky L. Tawekal, Faisal D. Purnawarman and Yati Muliati

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705002>

PDF (523.0 KB) | [References](#)

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

## Dynamic Response of Breasting Dolphin Moored with 40,000 DWT Ship due to Parallel Passing Ship Phenomenon 05003

Heri Setiawan and Muslim Muin

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705003>

PDF (930.8 KB) | [References](#)



Open Access

## Efficiency Comparison between Conventional and Modern Port Operation System for Small-Scale Dry Bulk Cargo 05004

Aulia Tiara and Julfikhsan Ahmad Mukhti

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705004>

PDF (1.151 MB) | [References](#)



Open Access

## Application MuTsunami in Mentawai Island Indonesia 05005

Muslim Muin, Izqi Yustina Ammylia Yusuf and Hendra Achiari

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705005>

PDF (759.1 KB) | [References](#)



Open Access

## Adaptive Port Planning under Disruptive Trends with focus on the case of The Port of Kuala Tanjung, Indonesia 05006

Andre Prakoso, Poonam Taneja and Tiedo Velinga

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705006>

PDF (716 KB) | [References](#)

OK



Open Access

## Structural Development for Well Service Activity in Limited Capacity Platform 05007

Marciela Esa Dewa, Muhammad Arifin and Eki Primudi

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705007>

PDF (613 KB) | [References](#)

By using this website, you agree that EDP Sciences may store web audience measurement cookies

Renewable Energy Potentials along the Bay of Bengal due to Tidal Water Level Variation 05008

Myisha Ahmad, G. M. Jahid Hasan, H. M. Mohaymen Billah Chy and Gazi Masud Md. Mahenoor

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705008>

PDF (997.5 KB) | References

☐ Open Access

Hydrodynamics Modeling of Khung Krabaen Lagoon, Chanthaburi Province, Thailand 05009

Pokavanich Tanuspong, Buranapratheprat Anukul and Aryuthaka Chittima

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814705009>

PDF (1.10 MB) | References

☐ Open Access

ERRATUM

Erratum to: Development of Risk-Reliability Based Underwater Inspection for Fixed Offshore Platforms in Indonesia 05010

Ricky L. Tawekal, Faisal D. Purnawarman and Yati Muliati

Published online: 20 February 2018

DOI: <https://doi.org/10.1051/mateconf/201814705010>

PDF (123.2 KB)

OK

## - Construction Management

☐ Open Access

A Global Review of Public Private Partnerships Trends and Challenges for Social Infrastructure 06001

Adrianto Oktavianus, Iris Mahani and Meifrnaldi

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814706001>

PDF (346 KB) | References

☐ Open Access

Initial Study on Building Information Modeling Adoption Urgency for Architecture Engineering and Construction Industry in Indonesia 06002

Fauzan Alfi Agirachman, Ilham Fajar Putra and Adam Angkawijaya

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

PDF (371 KB) | References

☐ Open Access

### Development of Work Breakdown Structure (WBS) Standard for Producing the Risk Based Structural Work Safety Plan Of Building 06003

Vania Elsy, Yusuf Latief and Leni Sagita

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814706003>

PDF (475 KB) | References

☐ Open Access

### The influence of wage, age and experience to labor productivity in construction works in Kota Langsa, Aceh 06004

Ipak Neneng Mardiah Bukit, Yulina Ismida, Rizcy Maulana and Muhammad Nasir

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814706004>

PDF (419 KB) | References

☐ Open Access

### Value engineering application for conceptual design of seawater desalination plant in Jakarta 06005

Rian Mantasa Salve Prastica, Almasul Auzan, Niswatin Farika, Nonik Eko Wahyuning Tiyas, Pratomo Cahyo Nugroho and Riko Apriatresnayanto

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814706005>

PDF (629 KB) | References

☐ Open Access

### Improving Role of Construction Industry for More Effective Post-Disaster Emergency Response To Road Infrastructure in Indonesia 06006

Krishna S. Pribadi, Eliza Puri, Eliya Hanafi and Tri Hadinata

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814706006>

PDF (572 KB) | References

## - *Geotechnical Engineering*

By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Najib, Agus Setyawan and Dwiyanto Joko Suprpto

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814707001>

PDF (2.472 MB) | [References](#)

☐ [Open Access](#)

Modeling Slope Topography Using Unmanned Aerial Vehicle Image Technique 07002

Fu-Hsuan Yeh, Chun-Jia Huang, Jen-Yu Han and Louis Ge

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814707002>

PDF (1.29 MB) | [References](#)

☐ [Open Access](#)

Bearing Capacity of very Expansive Soils at Jatinangor Area, West Java, Indonesia 07003

David Simangunsong, Satrio Wibowo and Zufialdi Zakaria

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814707003>

PDF (502 KB) | [References](#)

☐ [Open Access](#)

Probabilistic Analysis of Cut-Slope Stability for Tropical Red Clay of Depok, West Java as an Effect of Rainfall Duration and Intensity 07004

Fathiyah Hakim Sagitaningrum, Widjojo Adi Prakoso and Erly Bahsan

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814707004>

PDF (1.35 MB) | [References](#)

☐ [Open Access](#)

Assessment of Bridge Substructure in Java Island 07005

Pringg Satria Panji, Tommy Ilyas and Erly Bahsan

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814707005>

PDF (512 KB) | [References](#)

☐ [Open Access](#)



By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)

Fritz R. P. Nababan

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814707006>

PDF (783 KB) | [References](#)

☐ [Open Access](#)

Observational Method for More Reliable Settlement Prediction for Reclamation on the Holocene Marine Clay Deposit in Jakarta Bay 07007

Budiwan Adi Tirta, M. Adecar Nugroho, Bonifacius Parahita and Dirk-Jan Jaspers Focks

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814707007>

PDF (1.52 MB) | [References](#)

## **- Environmental Protection and Management**

☐ [Open Access](#)

Insight look the subsidence impact to infrastructures in Jakarta and Semarang area; Key for adaptation and mitigation 08001

Heri Andreas, Hasanuddin Zainal Abidin, Dhota Pradipta, Dina Anggreni Sarsito and Irwan Gumilar

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814708001>

PDF (1.76 MB) | [References](#)

OK

☐ [Open Access](#)

Utilization of alternative fuels and materials in cement kiln towards emissions of benzene, toluene, ethyl-benzene and xylenes (BTEX) 08002

Ulfi Muliane and Puji Lestari

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814708002>

PDF (577 KB) | [References](#)

☐ [Open Access](#)

Stream Sediment Geochemical Survey of Selected Element In Catchment Area Of Saguling Lake 08003

Eka Wardhani, Suprihanto Notodarmojo and Dwina Roosmini

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814708003>

By using this website, you agree that EDP Sciences may store web audience measurement cookies and, on some pages, cookies from social networks. [More information and setup](#)

[Open Access](#)

Assessment of Infectious Waste Management Practices at Hospital with Excellent Accreditation Level in Bandung, Cimahi and East Jakarta, Indonesia 08004

Novi Fitria, Enri Damanhuri and Indah R.S Salami

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814708004>

[PDF \(280 KB\)](#) | [References](#)

[Open Access](#)

Study of whole effluent acute toxicity test (*Daphnia magna*) as an evaluation of Ministry of Environment and Forestry Decree No. 3 In 2014 concerning industrial performance rank in environmental management 08005

Neng Rohmah, Dwina Roosmini and Mochamad Adi Septiono

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814708005>

[PDF \(988 KB\)](#) | [References](#)

[Open Access](#)

The progressive realization of human rights to water: the legal basis, policy implications, and monitoring challenge 08006

Anindrya Nastiti and Teddy Prasetiawan

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814708006>

[PDF \(287 KB\)](#) | [References](#)

[OK](#)[Open Access](#)

Acidic Wet Deposition in Bandung City Indonesia 08007

Nia Yuniarti Hasan, Driejana, Aminudin Sulaeman and Herto Dwi Ariesyady

Published online: 22 January 2018

DOI: <https://doi.org/10.1051/mateconf/201814708007>

[PDF \(654 KB\)](#) | [References](#)



By using this website, you agree that EDP Sciences may store web audience measurement cookies

and, on some pages, cookies from social networks. [More information and setup](#)



[Mentions légales](#)

[Contacts](#)

[Privacy policy](#)

*A Vision4Press website*

By using this website, you agree that EDP Sciences may store web audience measurement cookies

OK

and, on some pages, cookies from social networks. [More information and setup](#)



Journals

Books

Conferences


EDPS Account



**MATEC** Web of Conferences

All issues   Series  
Forthcoming   About

Search   Menu

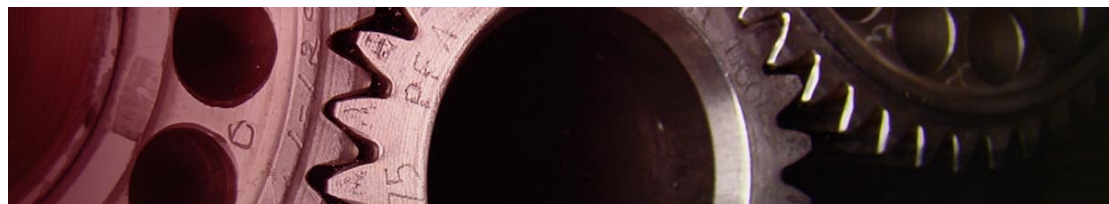

About the journal [Editorial board](#)

## About the journal

[Aims and scope](#)

[Editorial board](#)

[Indexed in](#)

[Publishing Policies & Ethics](#)

[Published by](#)

## Editorial board

---

**Rachid Bennacer**

École Normale Supérieure, Cachan, France

[website](#)

**Chérifa Boukacem-Zeghmouri**

Université Claude Bernard Lyon 1, Villeurbanne, France

[website](#)

**Vladimir Buzek**

Slovak Academy of Sciences, Bratislava, Slovakia

[website](#)

**Heidi Gautschi**

Haute Ecole Pédagogique de Lausanne, Switzerland

**Jamshed Iqbal**

University of Hull, United Kingdom

[website](#)

By using this website, you agree that EDP Sciences may store web audience measurement cookies

OK

and, on some pages, cookies from social networks. [More information and setup](#)  
[website](#)

**Maria S. Madjarska**

Max Planck Institute for Solar System Research, Germany

**Thierry Maré**

Ambassade de France en Indonésie, Jakarta

Université de Rennes 1 /IUT Saint Malo, France

[website](#)

**Nigel Mason**

University of Kent, Canterbury, United Kingdom

**Biswajeet Pradhan**

University of Technology Sydney, Australia

[website](#)

**Jun Sun**

Tianjin University of Science and Technology, P.R. China

[website](#)

**Ming-Jun Zhang**

DGUT-CNAM Institute, Dongguan University of Technology, Guangdong Province, P.R. China

[website](#)

**Zhien Zhang**

West Virginia University, Morgantown, West Virginia, USA

MATEC Web of Conferences

eISSN: 2261-236X



[Mentions légales](#)

[Contacts](#)

[Privacy policy](#)

By using this website, you agree that EDP Sciences may store web audience measurement cookies and, on some pages, cookies from social networks. [More information and setup](#)

OK

also developed by scimago:



SCIMAGO INSTITUTIONS RANKINGS

SJR

Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name



Home

Journal Rankings

Country Rankings

Viz Tools

Help

About Us

Ads by Google

Stop seeing this ad

Why this ad? ⓘ

MATEC Web of Conferences 

# Leachate Treatment from Sarimukti Landfill Using Ozone with Sludge from Water Treatment Plant as a Catalyst

Muhammad Yudha Ramdhani<sup>1,\*</sup>, M. Ranga Sururi<sup>1</sup>, and Siti Ainun<sup>1</sup>

<sup>1</sup>Institut Teknologi Nasional, Environmental Engineering Department, 40124 Bandung, Indonesia

**Abstract.** Leachate is the liquid waste from anaerobic decomposition in a landfill. The ozonation process can be used for leachate treatment. Sludge from sedimentation in water treatment plant contains 5.96% of Al and 9.35% of Si which can affect of its cation exchange capacity and affects the active site in the catalyst. This study aims to determine the effectivity of sludge in the ozonation process to treat leachate. A 1,5 L semi-batch reactor containing 1 L sample was used in this experiment with the rate of oxygen supply was at 4 L/min taken from ambient air. Two groups of sludge weighing 1.5 grams, 3.0 grams and 4.5 grams were used and activate with physically and chemically activated. The best result was obtained by the physically activated sludge with mass of 4.5 gram O<sub>3</sub>-L-4,5 AF. The differences of removal efficiency between O<sub>3</sub>-L-4,5 AF with the control (O<sub>3</sub>) for turbidity were respectively 13.02% and 7.81%, for EC were 10.57% and 8.29%, for COD were 49.44% and 37.50%, and for residual ozone concentration at the end of contact time were 7.6 mg/L and 9.7 mg/L. It can be concluded that activaed sludge and ozonation can be used as a catalyst in leachate treatment.

## 1 Introduction

Population growth will lead to an increase in the amount of waste disposed off to a landfill. The waste disposed to the landfill undergoes several simultaneous physical, chemical, and biological changes that produce a liquid called leachate [26,12]. Leachate is the liquid from solid waste decomposition in a landfill. Leachate will be produced, with a high chemical oxygen demand (COD), low biodegradability, heavy metals, pathogens [25], organic materials (biodegradable and non-biodegradable), and ammonia-nitrogen [27].

The commonly used techniques to treat leachate in Indonesia is the use of stabilization ponds [5]. This technique has the disadvantages of which is the long detention time, and required a large area. Stabilization ponds also used at Sarimukti landfill, and based on measurement data from the west java provincial government through the department of settlements and housing (Diskimrum), 2016, the results of leachate treatment with stabilization pond technique has a BOD/COD ratio of 0.050 [29], and the effectiveness of COD removal was only 13,94% [20]. The effectiveness of biological leachate treatment in Sarimukti landfill is less effective, because leachate is a wastewater that is difficult to treat by biological [4], due to the complex nature of the COD component [2]. Therefore, chemical processing alternatives are required, i.e. using ozone.

Ozonation processes are attractive means for the treatment of landfill leachates due to the high oxidative power that ozone possesses [25]. Ozonation is a chemical process that can oxidize many organic and inorganic materials in water. Ozone is a very selective oxidant, and unstable in water because it can decompose quickly, however the unique feature of ozone is its decomposition into hydroxyl radicals (OH<sup>\*</sup>) which are the strongest oxidants can react fast with many dissolved compounds and the water matrix [9]. According to Nuriana, 2015, leachate treatment with ozone has a removal efficiency for turbidity of 91.47%, electrical conductivity (EC) of 20.41%, and COD of 35% [14]. The ozonation process can be optimized by various advanced oxidation process (AOP) such as the addition of peroxide (H<sub>2</sub>O<sub>2</sub>), UV, and catalytic ozonation. According to Sururi et.al, 2014, the addition of 0.6 gr/L H<sub>2</sub>O<sub>2</sub> in diluted the leachate sample taken from Sarimukti landfill has a removal efficiency COD of 28.9%, and with the use of UV lamps within 10 cm of the ozone contactor has efficiency of 23.4% [23,12].

In the last few years heterogeneous catalytic ozonation has been successfully used for the removal of organic compounds [9]. Heterogeneous catalytic ozonation is one of the oxidant techniques used to improve the efficiency of ozonation process [10]. The application of ozonation technique by using a catalyst is a promising alternative for leachate treatment. The sludge from water treatment plant can be used as a

\* Corresponding author: [ramdhani.yudha@outlook.co.id](mailto:ramdhani.yudha@outlook.co.id)



catalyst, based on Muruganandham et.al, 2007, found that water treatment sludge powder was successfully used as an ozone decomposition catalyst in aqueous medium. Increase in the catalyst loading from 125 to 750 mg significantly promotes the percentage of ozone decomposition from 50.9% to 96.2% [13]. Thus, it is predicted that the use of sludge in the ozonation process of leachate treatment can accelerate the decomposition of ozone into  $\text{OH}^\bullet$ .

Because the leachate treatment at Sarimukti landfill which has a very low BOD/COD ratio, it needs chemical processing with ozone. Ozone is a powerful oxidant that can treat waste that is difficult to degrade such as leachate. In addition, this study aims to determine the effectiveness of the addition of sludge from drinking water treatment to treat leachate which is assumed to accelerate the decomposition of ozone to  $\text{OH}^\bullet$ .

## 2 Materials and Methods

### 2.1. Materials

Grab sample were taken from the Sarimukti landfill leachate collection points. The sludge that will be used as a catalyst was collected from sedimentation unit of Tirtawening water treatment plant in Bandung. The sludge was previously examined using X-ray Fluorescence (XRF) which showed that the sludge consist of 9.35% Si, and 5.96% of Al, such that the Si/Al ratio is 1.56, this Si/Al value is dominated by silica content rather than aluminium, while Sururi et.al, 2016, says that aluminium acts as a catalyst. After that, the sludge as a catalyst was sieved based on ASTM D 421-85 to determine the coefficient of uniformity [22], which was 5.67, indicating a much more sand. Because the sludge was too fine sand, it is necessary to solidified, by compacting, to get a greater specific gravity than before. If the sludge is not solidified, it will cause the sludge to carried away during the ozonation process at the time of measurement. Egg whites were used for solidification as an adhesive, which serves to attached the sludge.

The catalyst is then physically and chemically activated. Physical activation was done by heating at  $105^\circ\text{C}$  for 24-36 hours [28]. For chemical activation, the solidified sludge was heated at  $105^\circ\text{C}$  for 24-36 hours, and impregnated with 24.5 ml of 3 mol/L per 10 gr of sample with  $\text{ZnCl}_2$  for 24 hours at room temperature; after which the supernatant liquid was removed, and the sludge was dried at  $105^\circ\text{C}$  for 24 hours. For chemical activation, the sludge was than washed using 3 mol/L HCl to remove inorganic impurities, rinsed with de-ionized water and dried at  $105^\circ\text{C}$  for 24 hours [28]. A  $\text{pH}_{\text{PZC}}$  measurements was taken for the activated sludge, to know the pH where the catalyst is uncharged or the positive and negative charges are equal (isoelectric point) [7]. A  $\text{pH}_{\text{PZC}}$  in this study was measured to understand the mechanism of catalytic ozonation of the adsorption phenomenon from the catalyst when it is used in the ozonation process. Measurement of  $\text{pH}_{\text{PZC}}$  was done by titration [16]. Firstly the sludge as catalyst were washed with de-ionized water and dried in an oven at

$108^\circ\text{C}$  for 2 hours. Subsequently, sludge as much as 0.1 gr was added to 25 mL of  $10^{-3}\text{mol/L}$  NaCl with continues stirring. The pH changed gradually and become constant at the point of zero charge ( $\text{pH}_{\text{PZC}}$ ) [16]. Physically activated sludge has a  $\text{pH}_{\text{PZC}}$  value of 6.46-7.05 pH, while chemically activated with  $\text{ZnCl}_2$  has a  $\text{pH}_{\text{PZC}}$  value of 4.32-4.42 pH.

### 2.2 Materials and Methods

This study was conducted in a semi-batch reactor with continuous ozone gas supply to the contactor filled with leachate sample. The equipment used in this studies consisted of an aerator, a flow meter, an ozone generator, and an ozone contactor that can be seen in Figure 1.



**Fig. 1.** Reactor Configuration.

The flow rate of oxygen supply was at 4 L/min taken from ambient air as connected to an ozone generator. The Ozone generator which changes the  $\text{O}_2$  into  $\text{O}_3$ , has a spesification of OZF-1G, 200 W, and 220 V. The ozone generated was applied to an ozone contactor (1500 ml) which had previously been filled with 1000 mL of leachate sample. Sludge as a catalyst was then added to the ozone contactor with different activation and weight. Physically activated abbreviated as AF and chemically activated abbreviated as AK, have a weight variation of 1.5 gr ( $\text{O}_3\text{-L-1,5 AF/AK}$ ); 3.0 gr ( $\text{O}_3\text{-L-3,0 AF/AK}$ ); and 4.5 gr ( $\text{O}_3\text{-L-4,5 AF/AK}$ ) was prepared. To make a homogeneous ozone condition through out the leachate sample, the contactor was equipped with magnetic stirrers. The ozonation process is carried out for 180 min, with samples taken  $\pm 30$  ml every 30 minutes. Parameter such as pH, dissolved oxygen (DO), residual ozone concentration (ROC), turbidity, electrical conductivity (EC), and chemical oxygen demand (COD) were measured every 30 minutes.

## 3 Results

### 3.1. Leachate Characteristics and Sludge as Catalyst

The results of measurement of the initial characteristics of leachate sample from Sarimukti landfill can be seen in Table 1.

**Table 1.** Leachate Characteristic.

No	Parameter	Unit	Concentration
1	pH	-	7.86-8.40
2	DO	mg/L	1.34-5.10
3	Turbidity	NTU	45.25-116.75
4	EC	mS/cm	4.31-29.57
5	COD	mg/L	4286-8378


Table 1 shows that the pH is neutral or slightly alkaline. This high pH value indicates that there are many hydroxide ions ( $\text{OH}^-$ ) that can act to initiate the process of ozone decomposition [8]. The value of DO in the leachate sample were at 1.34-5.10 mg/L, indicating the amount of oxygen ( $\text{O}_2$ ) available in the leachate. Oxygen fluctuations can affect to other chemical parameters, especially during oxygen-free conditions, which can lead to changes in the solubility properties of some chemical elements in the water [11, 6]. Sarimukti landfill and Jatibarang landfill is a landfill that has been operating for more than 10 years, and has similarities in treating leachate with stabilization pond. Sarimukti and Jatibarang landfills has a slightly similar pH were respectively 8.4 and 8.5, and for COD were 4286-8378 mg/L and 4000 mg/L [19].

The turbidity of the sample were 45.25-116.75 NTU indicate the amount of organic and inorganic content suspended in the leachate. The value of turbidity from Sarimukti landfill is lower than Jatibarang landfill of 300 NTU [19]. The EC of the sample were at 4.31-29.57 mS/cm indicating the inorganic content of the leachate sample. The value of EC is very high as compared to other leachates in other landfills in Indonesia which ranges from 1000-40000  $\mu\text{S}/\text{cm}$  [24]. The concentration of COD were 4286-8378 mg/L indicating the number of organic compounds that were biodegradable and non-biodegradable. The value of COD is very high when compared with the effluent quality standard of leachate treatment plant in Indonesia, about the effluent leachate of 300 mg/L [17].

Sludge is predicted can used as a catalyst for ozone decomposition and also be utilized as an adsorbent. According to Ikhlaiq et.al, 2012, the pH of a solution plays an important role in understanding the mechanisms of catalytic ozonation, since it is affected by ozone decomposition. At basic pH ( $\text{pH} > \text{pH}_{\text{PZC}}$ ) the surface is negatively charged (no surface hydroxyl groups present), at acidic pH ( $\text{pH} < \text{pH}_{\text{PZC}}$ ) its surface is positively charged (presence of hydroxyl groups), while at  $\text{pH} = \text{pH}_{\text{PZC}}$  the surface is neutral [9]. Sludge as the catalyst used in this process has different  $\text{pH}_{\text{PZC}}$  between activation variations.  $\text{pH}_{\text{PZC}}$  on physically activated catalysts of 6.46-7.05 pH and  $\text{pH}_{\text{PZC}}$  on chemical activated catalysts of 4.32-4.42 pH. Because the pH of the solution is higher than  $\text{pH}_{\text{PZC}}$ , it is predicted that the sludge will act as adsorbent of  $\text{O}_3$  and organic matter, so that the reaction of ozone and organics will occur at the surface of sludge, see Tabel 1.

### 3.2. Response to The Ozonation Process Based on pH and DO


pH is used as an indicator for hydrogen ion activity [21]. A high pH value indicates more hydroxide ions ( $\text{OH}^-$ ) acting as an initiator in the decomposition of ozone [8]. In the ozonation system pH usually gives a positive effect on the removal rate of COD [3]. A high pH value is important because the hydroxide ions will start the ozone decomposition involving the following reactions [8]:




if  $\text{pH} \leq 8$ :



if  $\text{pH} \geq 8$ :



These reactions will increase pH by time as can be seen in Figure 2. The pH of all variations increase with increasing contact time as indicated by the increasing of hydroxide ions. The physically activated catalysts resulted in a higher pH than the control condition, and the other variations. The more catalyst was added during the ozonation process will result in higher pH values. Based on the reaction (1) and (2) the initiation of ozone decomposition can be accelerated by increasing the pH or by the addition of hydrogen peroxide [1].

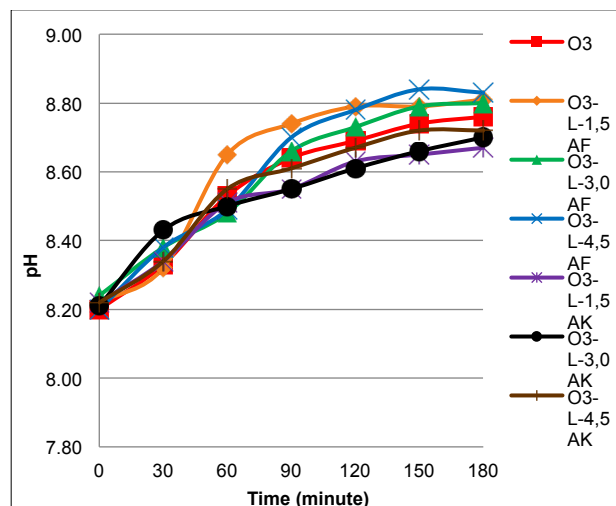

**Figure 2.** pH Change by Time.

Dissolved oxygen is one of the important parameters in leachate after going through ozonation process. Figure 3 shows that the DO fluctuates during the 180 minutes of the process. Increased DO occurred because of the decomposition process of ozon based on reactions (1) and (2); and its decrease, occurred because oxygen acts

as an oxidizing agent which react with the organic material in the leachate.

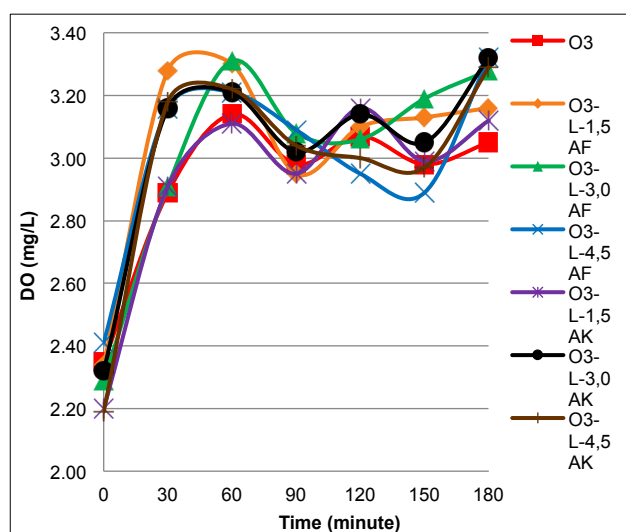


Figure 3. Dissolved Oxygen by Time.

### 3.3. Residual Ozone Concentration (ROC)

ROC measurements were conducted to find out the more dominant type of reaction (direct reaction and indirect reaction) occurring between ozone and the organic, and inorganic constituent in the sample. A direct reaction is a selective reaction that causes high ROC value due to the low ozone decomposition into  $\text{OH}^\bullet$ . The indirect reaction, however, is non-selective indicated by the low ROC value due to the high ozone decomposition into  $\text{OH}^\bullet$ . Measurements were made at the last 3 contact points because they were a critical points, and there has been decoloration on leachate sample [20].

Figure 4 shows a fluctuating ROC for all variations. The chemically activated catalysts resulted in higher ROC values than the physically activated, but it is lower than the control condition. The more catalyst was added, the faster the ozone decomposition takes place, which indicates an indirect reaction by  $\text{OH}^\bullet$ , evidenced by low ROC values due to the high ozone decomposition into the  $\text{OH}^\bullet$ . Based on the ROC data, it can be concluded, that the addition of sludge as catalyst can accelerate the decomposition of ozone into  $\text{OH}^\bullet$ .

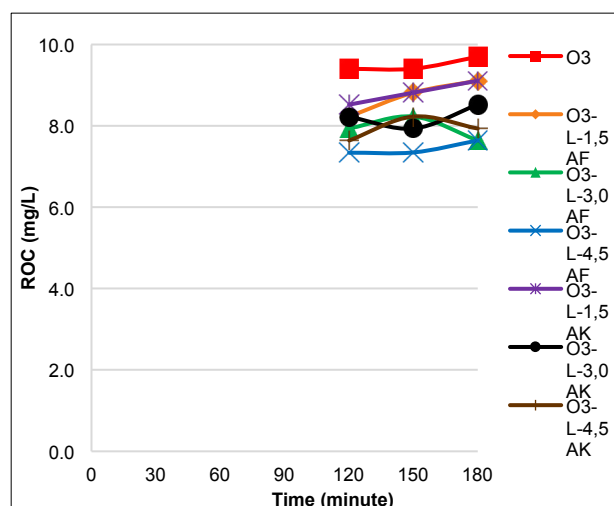


Figure 4. Residual Ozone Concentration.

### 3.4. Process Efficiency

#### 3.4.1 Physical Parameter: Turbidity Removal

Turbidity, expressed in NTU (nephelometric turbidity units), is caused by material suspended from colloidal size to dispersed coarse material [21].

Figure 5 shows that turbidity can be decreased by all variations; indicating an increase in the effluent discharge efficiency. The chemically activated catalysts removed turbidity the most, by 13.83-14.92% which were higher than the control of 7.81%, and other physically activated catalysts of 11.58-13.02%. This phenomenon occurred because  $\text{ZnCl}_2$  can bind water molecules contained in the sludge, which causes the pores of the sludge to increase its surface area [15], so that many pollutants can be adsorbed by the chemically activated catalysts.

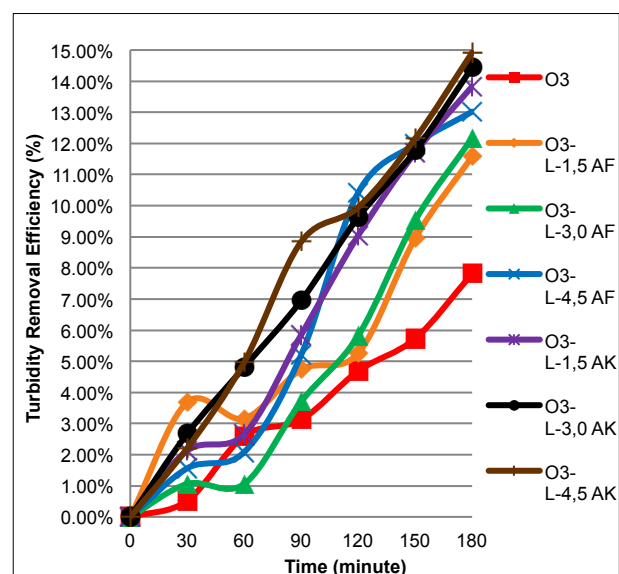


Figure 5. Turbidity Removal Efficiency.

Figure 5 also shows that the more catalyst was added, the higher the rate of turbidity removal. The highest level

of removal was found for the O<sub>3</sub>-L-4,5 AK, which decreases the turbidity from 45.25 NTU to 38.50 NTU or a removal efficiency of 14.92%. The decrease in turbidity occurs because ozone can degrade compounds that cause turbidity during the ozonation process. Continuous ozonation process create negatively charged colloidal particles which can be neutralized by ozone [18]. This phenomenon can be attributed to the high pH value of this variation as shown in Figure 2 and low ROC value as shown in Figure 4. The alkaline pH is indicated by the amount of OH<sup>-</sup> ions, and the low ROC indicates the amount of ozone decomposed into OH<sup>•</sup>, causing the turbidity of the sample to decrease.

### 3.4.2 Physical Parameter: EC Removal

In this study the ion measured as electrical conductivity was estimate that to represent the inorganic content in the leachate sample.

Figure 6 shows that all catalyst variations increase the efficiency of removing the inorganic content of the leachate. The chemically activated catalysts removed EC by 7.82-8.77% which were higher than the control of 8.29%, but it is lower than the physically activated catalysts of 10.44-10.57%. The low removal efficiency for the chemically activated catalysts can be caused by saturation of it's surface area, as this variation was able to decrease turbidity more than the physically activated catalyst.

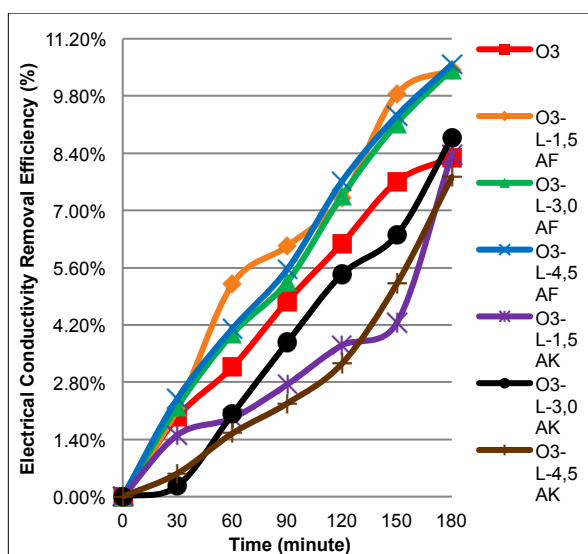


Figure 6. Electrical Conductivity Removal Efficiency.

The highest EC removal was found for of the O<sub>3</sub>-L-4,5 AF which decreased the EC from 19.96 mS/cm to 17.85 mS/cm, or a removal efficiency of 10.57%. This phenomenon once again can be attributed to the high pH value of this variation as shown in Figure 2, and has a low ROC value as shown in Figure 4. High pH, and low ROC indicate the amount of OH<sup>•</sup> formed that will react with the inorganic compound in the leachate sample. The low removal of inorganic compounds might be due to a material that is quite difficult to degrade, even using ozone which is a strong oxidizing agent.

### 3.4.3 Organic Parameter: COD Removal

COD removal was measured to find out how much organic compound can be eliminated, especially the non-biodegradables.

Figure 7 shows that each variation increases in COD removal by time. The chemically activated catalysts removed COD by 27.27-36.36% which were higher than the control of 30.0 0%, but the physically activated catalysts has a removal efficiency for COD of 27.27-40.00% higher than the other variations.

The highest COD removal was found for of the O<sub>3</sub>-L-4,5 AF which decreased the COD from 7616 mg/L to 4570 mg/L, or a removal efficiency of 40.00%. This phenomenon can also be attributed to the high pH value of this variation as shown in Figure 2. In addition, this variation has a low ROC value as shown in Figure 4, the low ROC indicates that ozone decomposes to OH<sup>•</sup>. The decrease in COD concentration is caused by a non-biodegradable organic substance which is oxidised either directly with ozone which is selective or indirect by OH<sup>•</sup> which has a non-selective property and converts it into an inorganic substance such as CO<sub>2</sub>.

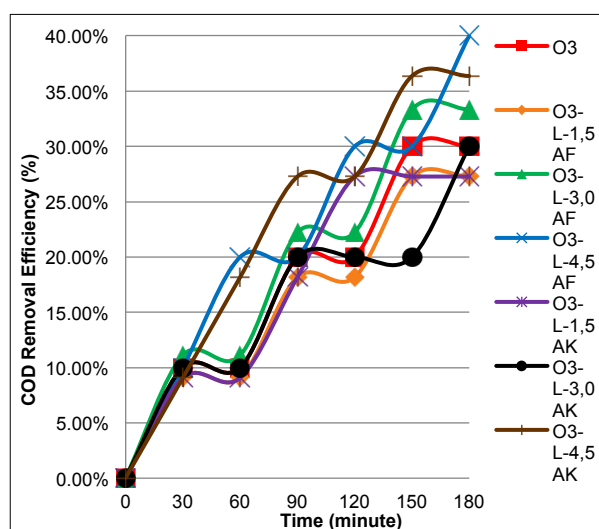


Figure 7. COD Removal Efficiency.

## 4 Conclusion

Several important conclusion can be drawn as follows:

1. The addition of sludge as a catalyst in the ozonation process can increase the ozone decomposition into OH<sup>•</sup>, thereby increasing the efficiency for removing organic and inorganic materials in leachate.
2. Sludge as a physically and chemically activated catalyst, in this study, showed a slightly different role in removal of pollutants. The physically activated catalysts were best to remove EC and COD. The chemically activated catalysts were best to remove turbidity.
3. The difference in sludge weight used during the research had an effect on the rate of removal, with more catalyst was added resulting in the higher the rate of removal, and the faster the decomposition of ozone.



4. Catalyst efficiency is an important parameter for commercial use. Further research is needed to determine the effect of catalyst if it is used more than once, and for optimum weight variation in leachate processing. Eventually the efficiency of a catalyst determine its practical applications.

## References

1. Acero, J.L., & Gunten, U.V., Influence of Carbonate on the Ozone/Hydrogen Peroxide Based Advanced Oxidation Process for Drinking Water Treatment, *Ozone: Science & Engineering: The Journal of the International Ozone Association*, **22**:3, 305-328, (2000).
2. Barratt, P.A., Baumgartl, A., Hannay, N., Vetter, M., & Xiong, F., Chemox<sup>TM</sup>: Advanced Waste Water Treatment With The Impinging Zone Reactor, Published by Elsevier Science Ltd, Wat. Sci. Tech, **35**, No. 4, pp. 347-352, (1997).
3. Beltran, F.J., *Ozone Reaction Kinetics for Water and Wastewater Systems*, Lewis Publishers : Boca Raton, (2004).
4. Cortez, S., Teixeira, P., Oliveira, R., & Mota, M., Evaluation of Fenton and Ozone-Based Advanced Oxidation Processes as Mature Landfill Leachate Pre-treatments, *Journal of Environmental Management* **92**, 749-755, (2011).
5. Damanhuri, E., & Padmi, T., *Pengelolaan Sampah*, Diktat kuliah TL 3104, Institut Teknologi Bandung, Bandung, (2010).
6. Effendi, H., *Telaah Kualitas Air Bagi Pengelolaan Sumber Daya dan Lingkungan Perairan.*, Kanisius. Yogyakarta, (2003).
7. Gulicovski, J.J., Čerović, L.S., & Milonjić, S.K., Point of Zero Charge and Isoelectric Point of Alumina, *Journal of Materials and Manufacturing Processes*, **23**:6, 615-619, (2008).
8. Gunten, U.V., Ozonation of Drinking Water : Part I. Oxidation Kinetics and Products Formation, *Water Research*, **37**, 1443-1467, (2003).
9. Ikhlaiq, A., Brown, R. David., & Kasprzyk-Horden, B., Mechanisms of Catalytic Ozonation on Alumina and Zeolit in Water: Formation of Hydroxyl Radicals, *Applied Catalysis B: Environmental* **123-124**, 94-106, (2012).
10. Ikhlaiq, A., Brown, R. David., & Kasprzyk-Horden, B., Catalytic Ozonation for The Removal of Organic Contaminants in Water on Alumina, *Applied Catalysis B: Environmental* **165**, 408-418, (2015).
11. Jeffries, M., & Mills, D., *Freshwater Ecology, Principles and Management, Development in Hydrology*, Pergamon Press, Oxford, UK, **14** (1996).
12. Krisnawati, A., Sururi, M.R., & Ainun, S., Pengaruh Karakteristik Lindi Terhadap Ozonisasi Konvensional dan Advanced Oxidation Process (AOP), *Jurnal Rekayasa Lingkungan*, **2**, 2 (2014).
13. Muruganandham, M., Chen, S.H., & Wu, J.J., Evaluation of Water Treatment Sludge as a Catalyst for Aqueous Ozon Decomposition. *Catalysis Communications* **8**, 1609-1614, (2007).
14. Nuriana, W., Pengolahan Lindi TPA Sarimukti dengan Menggunakan Ozonisasi Konvensional dan Advanced Oxidation Process (AOP) Tipe Ozon/H<sub>2</sub>O<sub>2</sub>, Institut Teknologi Nasional, Bandung, (2015).
15. Prasetyo, Y., & Nasrudin, H., Penentuan Konsentrasi ZnCl<sub>2</sub> Pada Proses Pembuatan Karbon Aktif Tongkol Jagung dan Penurunan Konsentrasi Surfaktan Linier Alkyl Benzene Sulphonate (LAS). *UNESA Journal of Chemistry*, **2** (2013).
16. Preočanin, T., & Kallay, N., Točka nula i površinska gustoća naboja TiO<sub>2</sub> u vodenim otopinama elektrolita dobivene potencijometrijskom masenom titracijom. *Croatica chemica acta*; **79**: 95-106 (2006).
17. Republic of Indonesia's Government. Regulation of The Minister of Environment and Forestry Number 59 of 2016 Regarding The Quality Standards of Leachate for Business and/or Activities Place of Final Waste Processing, (2016).
18. Rezagama, A., & Notodarmojo, S., Kinetika Transfer Ozon dan Tren Kekeuhan Dalam Air Lindi Dengan Pengolahan Ozonisasi, Institut Teknologi Bandung, Bandung, (2012).
19. Rezagama, A., Hadiwidodo, M., Purwono, P., Ramadhani, N.F., & Yustika, M., Penyisihan Limbah Organik Air Lindi TPA Jatibarang Menggunakan Koagulasi-Flokulasi Kimia, *Jurnal Teknik*, **37**, **2**, 78-83 (2016).
20. Safria, P., Pengolahan Lindi Dengan Menggunakan Advanced Oxidation Process (AOP) Berbasis Ozon (O<sub>3</sub>/H<sub>2</sub>O<sub>2</sub>) Dengan Penambahan Zeolit Pada Kontaktor. Institut Teknologi Nasional, Bandung, (2016).
21. Sawyer, C.N., McCarty, P.L., & Parkin, G.F., *Chemistry for Environmental Engineering and Science*, 5<sup>th</sup> ed., McGraw-Hill. New York, (2003).
22. Standard Practice for Dry Preparation of Soil Samples for Particle-Size Analysis and Determination of Soil Constants, ASTM D421-85, (1998).
23. Sururi, M.R., Ainun, Si., & Krisna, A., Pengolahan Lindi Dengan Proses Oksidasi Lanjut Berbasis Ozon, *Jurnal Reaktor*, **15**, 20-26 (2014).
24. Sururi, M.R., Siti, S.A., & Safria, P.O., Leachate Treatment Using Advanced Oxidation Process with Zeolite as a Catalyst, 3<sup>rd</sup> International Postgraduate Conference on Biotechnology, ISBN 978-602-73103-1-5 (2016).
25. Tizaoui, C., Bouselmi, L., Mansouri, L., & Ghrabi, A., Landfill Leachate With Ozone and Ozone/Hydrogen Peroxide System, *Journal of Hazardous Materials* **140**, pp. 316-324 (2007).
26. Tchobanoglous, G., Burton, F.L., & Stensel, H.D., *Water and Wastewater Engineering*, Metcalf & Eddy, Inc, (2013).
27. Wang, Z.P., Z. Zhang., Lin, Y.J., Deng, N.S., Tao, T & Zhou, K., Landfill Leachate Treatment by Coagulation-Photooxidation Process, *J. Haz. mater.*, **B95**, 153-159 (2002).
28. Wen, G., Pan, Z.H., Ma, J., Liu, Z.Q., Zhao, L., & Li, J.J., Reuse of Sewage Sludge as a Catalyst in

- Ozonation – Efficiency for The Removal of Oxalic Acid and The Control of Bromate Formation, Journal of Hazardous Material 239-240. 381-388 (2012).
29. West Java Provincial Government, Department of Settlement and Housing, Quality Testing Center for Construction and Environment, A.2.BPSR.24-2-3.51.11.16 (2016).