

ISSN: 2186-2982 (Print) 2186-2990 (Online)



Scopus

EBSCO

CENGAGE Learning



GIF GLOBAL IMPACT FACTOR



VOLUME 17

Issue 63

November 2019

International Journal of GEOMATE

(Geotechnique, Construction Materials and Environment)



Tsu, Japan

THE GEOMATE INTERNATIONAL SOCIETY

<http://www.geomatejournal.com/>

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

Volume 17, Issue 63

DEVELOPMENT OF THE DEFORMATION MONITORING SYSTEM WITH WIRELESS SENSOR NETWORK AND EVALUATION OF MECHANICAL STABILITY FOR DAMAGED STONEWALLS Yuuya Katsuda, Satoshi Sugimoto, Yoichi Ishizuka, Shohei Iwasaki, Ryoma Takaesu and Minoru Yamanaka	1-8
SOFT CLAY IMPROVEMENT TECHNIQUE BY DEWATERING AND MIXING SANDY SOIL Flemmy Samuel Oye, Kiyoshi Omine and Zichen Zhang	9-16
PREPARATION OF GEOPOLYMER CEMENT FROM CRUSHED STONE BY-PRODUCT USING ALKALI FUSION Kazuki Sakamoto and Takaaki Wajima	17-22
DESIGN OF BASE ISOLATED REINFORCED CONCRETE BUILDING SUBJECTED TO SEISMIC EXCITATION USING EC 8 Norliyati Mohd Amin, Nabihan Ayub and Anizahyati Alisibramulisi	23-28
GEOSPATIAL MODEL OF PHYSICAL AND SOCIAL VULNERABILITY FOR TSUNAMI RISK ANALYSIS Abu Bakar Sambah, F. Miura, Guntur, Sunardi and A. F. Febriana	29-34
STUDY OF VEGE-GROUT AS COATING MATERIAL IN REDUCING SURFACE TEMPERATURE RC Omar, Hairin Taha, R. Roslan, INZ Baharuddin and AHanna	35-40
A CREATIVE VALIDATION METHOD FOR SELF COMPACTING CONCRETE (SCC) LATERAL PRESSURE MODEL USING ARCHIMEDES' LAW Saeed Nemati, Bijan Samali, Farshad Sanati, Yahya Aliabadizadeh and Farzad Yaghmaei	41-48
EFFICIENT REPAIR SCHEDULING STRATEGY OF A MULTI-SOURCE LIFELINE NETWORK USING CONSTRAINED SPANNING FOREST Lessandro Estelito Garciano, Agnes Garciano, Mark Tolentino and Abraham Matthew Carandang	49-54
BIOCEMENTATION OF SRI LANKAN BEACH SAND USING LOCALLY ISOLATED BACTERIA: A BASELINE STUDY ON THE EFFECT OF SEGREGATED CULTURE MEDIA Pahala Ge Nishadi Nayanthara, Anjula Buddhika Nayomi Dassanayake, Kazunori Nakashima and Satoru Kawasaki	55-62
PHYSICAL ANALYSIS CONDITIONS AROUND LEBAK BULUS MRT STATION IN SOUTH JAKARTA, INDONESIA Doddy Apriansyah, Lita Sari Barus, Ahmad Zubair, H. Andi Simarmata and Jachrizal Sumabrata	63-68
M-ESTIMATOR SAMPLE CONSENSUS PLANAR EXTRACTION FROM IMAGE-BASED 3D POINT CLOUD FOR BUILDING INFORMATION MODELLING Korawit Pleansamai and Krisada Chaiyasarn	69-76
COMPARISON OF BEDROCK AND SURFACE TIME HISTORIES SUBJECTED TO SUBDUCTION EARTHQUAKES IN A SELECTED LOCATION OF YOGYAKARTA Mochamad Teguh and Wisnu Erlangga	77-86
ULTIMATE BEARING CAPACITY OF COLLAPSING KHON KAEN LOESS T. Prommin and R. Nuntasarn	87-94
MODELING THE DISTRIBUTION OF CHEMICAL OXYGEN DEMAND TO DETERMINE THE OPTIMAL MILL EFFLUENT OUTLET LOCATION Eddy Rachman Gandanegara, Harman Ajiwibowo and Andojo Wurjanto	95-102
MODEL IDENTIFICATION FOR THE EVALUATION OF CRITICAL BUCKLING LOAD IN REINFORCED CONCRETE RECTANGULAR COLUMNS Oussama Jarachi, Moulay Larbi Abidi and Toufiq Cherradi	103-110
PREDICTING RESIDUAL FRICTIONAL ANGLE BY ATTERBERG LIMITS FOR RESERVOIR EMBANKMENT SOILS Chen Fang, Hideyoshi Shimizu, Tatsuro Nishiyama and Shin-Ichi Nishimura	111-118
ANALYSIS THE EFFECTS OF THE DEGREE OF SATURATION ON THE SLOPES STABILITY USING MODELLING AND NUMERICAL SIMULATION Dang Trung Thanh, Nguyen Tuan Long and Le Trong Thang	119-125

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

Volume 17, Issue 63

EFFECT OF DEEP SOIL MIXING TO INCREASING BEARING CAPACITY ON PEAT SOIL Ratna Dewi, William Borgan, Ira Zunita, Yulindasari and Maulid M. Iqbal	126-132
APPLICABILITY OF CRUSHED CLAY BRICK AND MUNICIPAL SOLID WASTE SLAG AS LOW-COST ADSORBENTS TO REFINE HIGH CONCENTRATE Cd (II) AND Pb (II) CONTAMINATED WASTEWATER G.M.P. Kumara and Ken Kawamoto	133-142
A CASE STUDY ON RECONSTRUCTION EFFECT FOR SMALL IRRIGATION TANK Alatannabuqi Zhang, Hideyoshi Shimizu and Toshiharu Kojima	143-148
EARTHQUAKE ANALYSIS IN EAST JAVA, INDONESIA BETWEEN 1960 – 2017 USING MARKOV CHAIN MODEL Adi Susilo, Farizky Hisyam and Wasis	149-156
GEOTECHNICAL SPECIFICATION OF AMERICAN AND KAZAKHSTAN STANDARDS IN PILE TESTING Askar Zhussupbekov, Assel Tulebekova, Talal Awwad, Turlybek Mussabayev and Akmaral Tleubayeva	157-163
RISK ASSESSMENT AND REHABILITATION POTENTIAL OF MUNICIPAL SOLID WASTE LANDFILLS IN BALI PROVINCE, INDONESIA I Made Wahyu Widyarsana, Enri Damanhuri, Elprida Agustina and Rizkia Nur Aulia	164-171
DRAINED SHEAR STRENGTH OF COMPACTED KHON KAEN LOESS FROM MULTISTAGE TRIAXIAL TEST S. Chatchawan and R. Nuntasarn	172-180
CHANGES IN JOINT SURFACE ROUGHNESS OF TWO NATURAL ROCKS DURING SHEARING Chen Cui, Ivan Gratchev, Matthew Chung and Dong-Hyun Kim	181-186
RE-EVALUATION OF SEISMIC HAZARD IN TASIKMALAYA CITY USING PROBABILISTIC APPROACH Bambang Sunardi, Supriyanto Rohadi, Anisa Dila Indriyani, Sulastri and Dwikorita Karnawat	187-194
THE INFLUENCE OF CLAY-LIKE MATERIALS PLASTICITY USED AS INFILLS, ON JOINTED ROCKS MECHANICAL BEHAVIOR Ngaha Tiedeu William, Jiang Deyi, Chen Jie and Fan Jinyang	195-202
SEISMIC BEHAVIOUR OF REINFORCED CONCRETE FRAME BUILDINGS WITH MASONRY INFILL Mouzzoun Mouloud and Cherrabi Abdelkader	203-209
LITHOLOGICAL IDENTIFICATION OF DEVASTATED AREA BY PIDIE JAYA EARTHQUAKE THROUGH POISSON'S RATIO ANALYSIS Marwan, Asrillah, M. Yanis and Yoshinori Furumoto	210-216
IMPACT OF PVA FIBER AS FINE AGGREGATE REPLACEMENT IN ALKALI-ACTIVATED FLY ASH ON FLOW RATE, MECHANICAL PROPERTIES AND DRYING SHRINKAGE Yuyun Tajunnisa, Wahyuniarsih Sutrisno and Mitsuhiro Shigeishi	217-223
EXPERIMENTAL STUDY ON THE DILATANCY OF ROCK SALT FROM AN UNLOADING PATH Yunfeng Zhao, Jinyang Fan, Deyi Jiang, Xiang Jiang and Wei Liu	224-232
ULTIMATE STRIP STRENGTH OF PERFOBOND STRIP WITH SMALL HOLE CONFINED BY CONCRETE COVER Shintaro Tani and Katashi Fujii	233-240
GEOELECTRICAL METHODS FOR GEOTHERMAL EXPLORATION IN ENDUT GEOTHERMAL PROSPECT AREA, BANTEN PROVINCE, INDONESIA Supriyanto, Maryadi Maryadi, Dyah Nindita Sahdarani and Ahmad Zarkasyi	241-248

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

Volume 17, Issue 63

A NEW GEOLOGICAL MAP FOR FORMATION DISTRIBUTION ON SOUTHERN PART OF SOUTH CHINA SEA: WEST KALIMANTAN, INDONESIA Husnul Kausarian, Shao Lei, Goh Thian Lai, Yuchi Cui and Batara	249-254
ANALYSIS OF STRATIGRAPHY AND SEDIMENTATION DYNAMICS OF COAL, SAWAHLUNTO FORMATION, OMBILIN BASIN Budi Prayitno, Muhammad Riva'i, Adi Suryadi, Husnul Kausarian and Fazrol Rozi	255-262
FATIGUE LIFE ANALYSIS OF RIGID PAVEMENT STRUCTURE WITH PERVIOUS CONCRETE BASE LAYER USING 2D FINITE ELEMENT METHOD Frisky Ridwan Aldila Melania Care and Bambang Sugeng Subagio	263-270
SOIL STABILIZATION WITH GEOPOLYMERS FOR LOW COST AND ENVIRONMENTALLY FRIENDLY CONSTRUCTION Wisam Dheyab, Zeyad Tariq Ismael, Mazin Ali Hussein and Bujang Bin Kim Huat	271-280
NUMERICAL ANALYSIS TO EVALUATE THE EFFECT OF RESTRAINED EDGE DISTANCE ON EARLY AGE CRACKING DUE TO DRYING SHRINKAGE Maha. Ali. Abusogi and WEI Xiao sheng	281-287
MODELING THE SPATIAL CONCENTRATION DISTRIBUTION OF ENVIRONMENTAL PARAMETERS AND TOTAL SUSPENDED SEDIMENT IN DIATAS LAKE, WESTERN SUMATRA, INDONESIA Andojo Wurjanto and Harman Ajwibowo	288-296
APPLICATION OF DIGITAL IMAGE TECHNOLOGY FOR DETERMINING GEOMETRY, STRATIGRAPHY, AND POSITION OF CRACKS INSIDE EARTH SLOPE Dewi Amalia, Indrasurya Budisatria Mochtar and Noor Endah Mochtar	297-306
FLOOD ROUTING ANALYSIS OF THE WAY SEPUTIH RIVER, CENTRAL LAMPUNG, INDONESIA Andojo Wurjanto, Trika Agnestasia Tarigan and Julfikhsan Ahmad Mukhti	307-314
SOIL TREATMENT BY BENTONITE AND FLY ASH FOR LINERS OF WASTE LANDFILL: A CASE STUDY IN VIETNAM Lan Chau Nguyen, Hai Long Chu and Lanh Si Ho	315-322
SAFETY FACTOR CHARACTERIZATION OF LANDSLIDE IN RIAU-WEST OF SUMATRA HIGHWAY Catur Cahyaningsih, Febby Asteriani, Puja Fransismik Crensonni, Tiggi Choanji and Yuniarti Yuskar	323-330
SEEPAGE FAILURE IN FOUNDATION OF WEIR WITH CUT-OFF WALLS BY MODEL EXPERIMENTS AND ELASTO-PLASTIC FEM Kenji Okajima	331-339
DETERMINE THE VULNERABILITY OF URBAN SURFACE WATER RESOURCES IN RACH GIA CITY, VIETNAM USING GEOGRAPHIC INFORMATION SYSTEM Dinh Tuan Hai and Trinh Thi Phin	340-346
COMPARATIVE ANALYSIS OF CONVENTIONAL SEISMIC SURVEY WITH PASSIVE SEISMOELECTRIC EXPLORATION AT GAS CONDENSATE FIELD V. S. Potylitsyn, G. Y. Shaydurov, D. S. Kudinov, E. A. Kokhonkova and P. V. Balandin	347-352
STRENGTH OF SOFT CLAY REINFORCED WITH 10 MM SINGLE CRUSHED COCONUT SHELL (CCS) COLUMN Muzamir Hasan, Ieszaliana Ali and Masayuki Hyodo	353-359
LABORATORY AND FIELD EVALUATION OF A-6 LATERITIC SOIL TREATED WITH RECLAIMED ASPHALT PAVEMENT AND ORDINARY PORTLAND CEMENT Mustapha Mohammed Alhaji, Musa Alhassan, Taiye Waheed Adejumo and Awwal Tanko Umar	360-370
ANALYSIS OF EROSION USING HYDROSEEDING ON POST COAL MINING IN MELAK SITE Waterman Sulistyana Bargawa and Arisdiansyah Putra, M. Nurcholis	371-377
MEASUREMENT OF ANTI-STRIPPING AGENT CONTENT IN ASPHALT MIXTURE WITH COLORIMETRIC TEST Zulkarnain Abdul Muis, Meriani Batubara, Adina Sari Lubis ³ and Renita Manurung	(378-385)

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

International Journal of GEOMATE is Abstracted/Indexed in: SCOPUS, Web of Science Emerging Sources Citation Index (ESCI), EBSCO, Global Impact Factor (GIF), Gale (a Cengage Learning Company), ULRICHSWEB, Global Serials Directory, etc.

Impact Factor (by GIF): 2015: 1.009; 2014: 0.987; 2013: 0.825; 2012: 0.714
Paper acceptance rate: 2015: 35.28%; 2014: 37.5%; 2013: 38.71%; 2012: 46.66%; 2011: 61.53%

Honorary Editor

Prof. Dr. Shoji Inoue, Professor Emeritus, Mie University, Japan

Editor-in-Chief:

Prof. Dr. Zakaria Hossain, Mie University, Japan

Assistant to the Editor-in-Chief:

Dr. Jim Shiau, University of Southern Queensland, Australia

Associate Editors:

Prof. Dr. Fumio Tatsuoka, Tokyo University of Science, Japan
Prof. Dr. Sai Vanapalli, University of Ottawa, Canada
Prof. Dr. Ian Jefferson, University of Birmingham, United Kingdom
Prof. Dr. Mounir Bouassida, National School of Engineering of Tunis
Prof. Dr. Bujang B.K. Huat, University Putra Malaysia, Malaysia
Prof. Dr. Nemy Banthia, University of British Columbia, Canada
Prof. Dr. Toshinori Sakai, Mie University, Japan
Prof. Dr. Valeriy Perminov, Tomsk Polytechnic University, Russia
Prof. Dr. Jing-Cai Jiang, University of Tokushima, Japan
Prof. Dr. Lilia Robles Austriaco, Angles University Foundation, Philippines
Prof. Dr. Muhammad Ibn Ibrahimy, International Islamic University, Malaysia
Prof. Dr. Shamsul I. Chowdhury, Roosevelt University, USA
Prof. Dr. Isabel Pinto, University of Coimbra, Portugal
Prof. Dr. Mark Jaksa, University of Adelaide, Australia
Prof. Dr. Kaneco Satoshi, Mie University, Japan
Prof. Dr. Junichiro Takeuchi, Kyoto University, Japan
Prof. Dr. Ranjith Pathegama Gamage, Monash University, Australia
Prof. Dr. Kingshuk Roy, Nihon University, Japan
Prof. Dr. Md. Shahin Hossain, Islamic University of Technology, Bangladesh
Prof. Dr. Pedro Arrua, Universidad Tecnológica Nacional, Argentina
Prof. Dr. Miguel A. Pando, University of North Carolina, USA
Prof. Dr. Saksun Horpibulsuk, Suranaree University of Technology, Thailand
Prof. Dr. Musharraf Zaman, University of Oklahoma, USA
Prof. Dr. Rafiqul Tarefder, University of New Mexico, USA
A/Prof. Dr. John Victor Smith, RMIT University, Australia
Prof. Dr. Basir Mir, National Institute of Technology Srinagar, India
Prof. Dr. Lily Surayya Eka, State Islamic University Syarif Hidayatullah Jakarta, Indonesia

A full list of sub-editors and editorial assistants are given in the web page.

Copyright © International Journal of GEOMATE

All rights reserved. In principle, no part of this publication or the information contained herein may be reproduced in any form or by any means, translated in any language, stored in any database or retrieval system, or transmitted in any form or by any means without prior permission in writing from the publisher.

Disclaimer: The editors and the publisher have tried their best effort to ensure integration and the quality of this publication and information herein. However, they give no warranty of any kind, expressed or implied with regard to the material contained in this journal, and will not be liable in any event for the consequences of its use.

Publisher: The GEOMATE International Society

Place of publication: Tsu city, Mie, Japan

Contact: Editor-in-Chief, Dr. Zakaria Hossain, Professor, Graduate School of Bioresources, Mie University, 1577 Kurimamachiya, Tsu city, Mie 514-8507, Japan

E-mail: editor@geomatejournal.com, URL: <http://www.geomatejournal.com/>

Tel & Fax: +81-59-231-9578

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

Founded in 2011, *The "International Journal of GEOMATE"* is a Scientific Journal of the GEOMATE International Society that encompasses a broad area in Geotechnique, Construction Materials, and Environment. The key objective of this journal is to promote interdisciplinary research from various regions of the globe. The editorial board of the journal is comprised of extensively qualified researchers, academicians, scientists from Japan and other countries of the world. It is a peer-reviewed journal that is published quarterly. All articles published in this journal are available online. Contributors may download the manuscript preparation template for submitting paper or contact to the Editors-in-Chief [editor@geomatejournal.com].

Aims and Scopes:

The journal aims to become an efficient mean of publishing and distributing high-quality information from the researchers, scientists, and engineers. The main scopes are as follows:

- Advances in Composite Materials
- Computational Mechanics
- Foundation and Retaining Walls
- Slope Stability
- Soil Dynamics
- Soil-Structure Interaction
- Pavement Technology
- Tunnels and Anchors
- Site Investigation and Rehabilitation
- Ecology and Land Development
- Water Resources Planning
- Environmental Management
- Earthquake and Tsunami Issues
- Safety and Reliability
- Geo-Hazard Mitigation
- Case History and Practical Experience
- Others

Review Policy:

- The paper which meets the editorial criteria will be assigned to at least two anonymous reviewers for peer-review.
- Authors may recommend some reviewers - however, Editors are entitled to consider them or not.
- The Editorial Board consists of an outstanding group that is responsible for the review process of the submitted manuscripts and will guarantee the quality of the publication.
- The manuscript will be published as soon as it is accepted and all the modifications recommended by the reviewers are made.
- The review procedure is as strict as in the most prestigious journals, but publication time is minimized.
- Based on the reviewers' comments, the Editors will make a decision on a paper as one of the following four conditions:
 1. Accept without revision
 2. Accept with minor revision
 3. Encourage to resubmit with major revision
 4. Reject

In case of acceptance with either minor or major revisions, the authors will be advised to revise the manuscript according to the reviewers' comments.

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

Instruction to Author:

The manuscript to be submitted should be prepared using the manuscripts submission template. Download the manuscript formatting template from download files menu. The manuscript to be submitted adheres to the rules and guidelines given in manuscript template. The manuscript should be written in English. List of references must be translated into English if other languages (both should be written). The page limit is 8 pages for ordinary manuscript and 10 pages for the invited manuscript. The references inside the text and in the bibliographic list should follow the formats as per the manuscript template. All figures, graphs, and tables must follow the font-style of the text. Ensure clear and good quality picture in the first submission. Selected manuscript from "GEOMATE Conference Presentation" will be reprinted in the journal with nominal charges (40% discount of regular fees) based on the agreement of the authors. Accepted papers which were not presented in "GEOMATE Conference" need publication charges of 800 USD as regular fees. Any page or fraction thereof exceeding page limit will be charged 100 USD per page. Extra author fee is 100 USD/author if exceeding 5 authors. This is required for its maintenance such as managing article submission and peer review, typesetting, tagging and indexing of articles, hosting articles on dedicated servers, supporting sales and marketing costs to ensure global dissemination via different databases, and permanently preserving the published journal article. Copyright: GEOMATE required to obtain copyright of papers from authors for the term of copyright by signing and returning the publishing agreement.

Submission Method:

Submit full manuscript online using "Submission" menu. We accept online submission only. Copyright release form to be e-mailed separately along with the manuscript submission. Download it from the "Download Files Menu". Abolition of printed version: Considering environmental conservation, the paper version has been discontinued since June 2016. For any questions: Contact us [editor@geomatejournal.com].

Membership Fees: Regular Member 100USD/year; Life Member 900USD only.

Membership Benefits:

- Receive Membership ID/Card
- Use M.G. or L.M.G. after your name (M=Member, G=Geomate, L=Life)
- Be involved in GEOMATE technical committees and activities
- Be up-to-date on the current development in the field
- Priority right to participate in international conferences with 20% discount
- 20% discount for Journal paper publication
- Vote in the election of GEOMATE officers
- Access to the Journal webpage

Membership Application (send the related items below using online form):

- Full Name:
- Title/Position (check one): Prof. A/Prof. Dr. Mr. Ms.
- Membership Category (check one): Regular Member Life Member Others
- Address:
- Tel & Fax:
- E-mail (co-authors email separated by comma):
- Research Area (check one): Geotechnique Construction Materials Environment Others

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

STATEMENT ON PUBLICATION ETHICS AND PUBLICATION MALPRACTICE (1/2)

The International Journal of GEOMATE is a double-blind peer-reviewed journal. All parties involved in the act of publishing an article for this journal, i.e.: the editors, the author, the peer-reviewers and the publisher must follow the ethical behavior indicated in the COPE's Best Practice Guidelines for Journal Editors. In order to warrant high-quality scientific publications, public trust in scientific findings, and that people receive credit for their ideas, the ethical standards for publication are followed.

DUTIES OF EDITORS

A decision on the Publication of Article: Based on the double-blind peer review of a paper, the Chief Editor and the Associate Editor are responsible for deciding which of the articles accepted for publication. Neither the Chief Editor nor the Associate Editor has the authority to influence the reviewers who are conducting the blind review of the articles submitted for peer review. The Chief Editor and the Associate Editor may be guided by the policies of the journal's Editorial Board and subjected to such legal requirements regarding libel, copyright infringement, and plagiarism.

Honest Play: Manuscripts submitted to GEOMATE shall be exclusively evaluated based mainly on their intellectual quality and significance. GEOMATE will not give any consideration to authors' race, gender, sexual orientation, religious beliefs, ethnic origin, citizenship, or political philosophy.

Confidentiality: The Chief Editor, the Associate Editor, and any editorial staff must not disclose any information about a submitted manuscript to anyone other than the corresponding author, reviewers, potential reviewers, other editorial advisers, and the publisher.

Disclosure and Conflicts of Interest: Unpublished materials disclosed in a submitted manuscript must not be used by anyone who has a view of the manuscript (while handling it) in his or her own research without the express written consent of the author.

DUTIES OF REVIEWERS

The contribution of Double-Blind Peer Review: Any identifying information will be stripped out from the submitted paper so that the reviewers do not know any information about the authors and vice versa i.e.: reviewers' comments to the editors are confidential and before passing on to the authors, it will be made anonymous. The Double Blind Peer review assists the reviewers in making editorial decisions, while editorial communications with the author may also assist the author in improving the manuscript. The names of the reviewers known only to the Chief Editor and the Associate Editor and it remains strictly confidential to authors.

Punctuality: Any selected referee who feels unqualified to review the assigned manuscript or unable to provide a prompt review should notify the Chief Editor and the Associate Editor and excuse himself/herself from the review process.

Confidentiality: Private information or ideas obtained through double-blind peer review must be kept confidential and not used for personal advantage. Manuscripts received for review must be treated as confidential documents. Without any authorization by the Chief Editor and the Associate Editor, the information of the submitted manuscript must not be shown to or discussed with, others.

Standards of Objectivity: There shall be no personal criticism of the author. Reviewers should express their views clearly with supporting arguments and reviews should be conducted objectively.

Acknowledgment of Sources: Authors should cite relevant references and corresponding citation if any statement in the submitted paper had been previously published or reported elsewhere. Reviewers should identify relevant published work that has not been cited by the authors. If a reviewer finds any substantial similarity or overlap between the submitted manuscript and any other published works, s/he should inform the Chief Editor/Associate Editors.

Conflict of Interest: In any reviewers find that the submitted manuscript has conflicts of interest resulting from competitive, collaborative, or other relationships or connections with any of the authors, companies, or institutions, s/he should not review that manuscripts and notify to the Chief Editor/Associate Editors prompt.

DUTIES OF AUTHORS

Reporting Standards: Authors of papers of original research should present an accurate account of the work performed as well as an objective discussion of its significance. Underlying data should be represented accurately in the paper. A manuscript should contain sufficient detail and references to permit others to replicate the work. Fraudulent or knowingly inaccurate statements constitute unethical behavior and are unacceptable.

Data Access and Retention: Authors may be asked to provide the raw data in connection with a paper for editorial review, and should be prepared to provide such data for public access or for access to the readers of the journal.

Originality and Plagiarism: The authors should ensure that they have written entirely original works, and if the authors have used the work and/or words of others, this must be appropriately cited or quoted. All papers published by International Journal of GEOMATE are committed to publishing only original material, i.e., material that has neither been published elsewhere nor is under review elsewhere. The paper that is found to have been plagiarized from a manuscript by other authors, whether published or unpublished, will incur plagiarism sanctions.

INTERNATIONAL JOURNAL OF GEOMATE

(Geotechnique, Construction Materials & Environment)

ISSN: 2186-2982(Print), 2186-2990(Online)

STATEMENT ON PUBLICATION ETHICS AND PUBLICATION MALPRACTICE (2/2)

Acknowledgment of Sources: Proper acknowledgment of the work of others must always be given. Authors should cite publications that have been influential in determining the nature of the reported work.

Manipulation of Citations: Submitted papers that are found to include citations whose primary purpose is to increase the number of citations to a given author's work, or to articles published in a particular journal, will incur sanctions for manipulation of citations.

Falsification and Fabrication: Submitted papers that are found to have either falsified or fabricated numerical/experimental results, including the manipulation of images, will incur data fabrication and falsification sanctions.

Authorship: The authorship of a paper should be limited to those who have made a significant contribution to the conception, design, execution, or interpretation of the reported study. All those who have made significant contributions should be listed as co-authors. Where there are others who have participated in certain substantive aspects of the research project, they should be acknowledged or listed as contributors.

Scientific Contribution: All listed authors must have made a significant scientific contribution to the research in the manuscript and approved all its claims. It is important to list everyone who made a significant scientific contribution, including students and laboratory technicians.

Corresponding Author: Corresponding Author is the author responsible for communicating with the journal for publication. The corresponding author should ensure that all appropriate co-authors and no inappropriate co-authors are included on the paper and that all co-authors have seen and approved the final version of the paper and have agreed to its submission for publication.

Acknowledgment of Funding Sources: Funding sources for the research reported in the manuscript should be duly acknowledged after the conclusion and before the list of references.

Disclosure and Conflicts of Interest: All sources of financial support for the project or any substantive conflict of interest that might be interpreted to influence the results of the paper should be disclosed.

Fundamental Errors in Published Works: It is the author's responsibility to promptly notify the Chief Editor/Associate Editor if s/he discovers a significant error or inaccuracy in his/her own published work to retract or correct the paper.

Redundant, Concurrent or Multiple Publications: An author should not, in general, publish manuscripts describing essentially the same research in more than one journal or primary publication. Manuscripts that are found to have been published elsewhere, or to be under review elsewhere, will incur duplicate submission/publication sanctions. If authors have used their own previously published work or work that is currently under review, as the basis for a submitted manuscript, they are required to cite the previous work and indicate how their submitted manuscript offers novel contributions beyond those of the previous work. Submitting the same manuscript to more than one journal concurrently constitutes unethical publishing behavior and is unacceptable. Redundant publications involve the inappropriate division of study outcomes into several articles.

SANCTIONS

In the event that there are documented violations of any of the above-mentioned policies in any journal, regardless of whether or not the violations occurred in a journal published by GEOMATE, the following sanctions will be applied:

- *Immediate rejection of the infringing manuscript.*
- *Immediate rejection of every other manuscript submitted to GEOMATE by any of the authors of the infringing manuscript.*
- *The prohibition against all of the authors for any new submissions to GEOMATE, either individually or in combination with other authors of the infringing manuscript, as well as in combination with any other authors. This prohibition will be imposed for a minimum of five years.*
- *Prohibition against all of the authors from serving on the Editorial Board of the International Journal of GEOMATE*

In cases where the violations of the above policies are found to be particularly outrageous, the publisher reserves the right to impose additional sanctions beyond those described above.

**SJR**

Scimago Journal & Country Rank

Enter Journal Title, ISSN or Publisher Name

[Home](#)[Journal Rankings](#)[Country Rankings](#)[Viz Tools](#)[Help](#)[About Us](#)

Pusat Tes Resmi IELTS

Dapatkan hasil tes Anda hanya dalam 3 5 hari kerja. Info lebih lanjut hubungi kami.

ielts.idp.com[Buka](#)

International Journal of GEOMATE

COUNTRY[Japan](#)

Universities and research institutions in Japan

SUBJECT AREA AND CATEGORY

[Agricultural and Biological Sciences](#)
[Soil Science](#)

[Earth and Planetary Sciences](#)

[Geotechnical Engineering and Engineering](#)
[Geology](#)

[Engineering](#)

[Building and Construction](#)

[Environmental Science](#)

[Environmental Engineering](#)

PUBLISHER

[GEOMATE International Society](#)

H-INDEX

21

PUBLICATION TYPE[Journals](#)**ISSN**[21862982, 21862990](#)**COVERAGE**[2011-2021](#)**INFORMATION**[Homepage](#)[How to publish in this journal](#)editor@geomatejournal.com

Advances in Civil Eng. Papers



Open

SCOPE






The journal aims to become an efficient mean of publishing and distributing high quality information from the researchers, scientists and engineers. The main scopes are as follows: Advances in Composite Materials- Computational Mechanics- Foundation and Retaining Walls- Slope Stability- Soil Dynamics- Soil-Structure Interaction- Pavement Technology- Tunnels and Anchors- Site Investigation and Rehabilitation- Ecology and Land Development- Water Resources Planning- Environmental Management - Public Health and Rehabilitation- Earthquake and Tsunami Issues- Safety and Reliability- Geo-Hazard Mitigation- Case History and Practical Experience- Others




Join the conversation about this journal

Quartiles

FIND SIMILAR JOURNALS ?

<p>1 Journal of The Institution of Engineers (India): Series A IND</p> <p>30% similarity</p>	<p>2 Advances in Materials Science and Engineering USA</p> <p>29% similarity</p>	<p>3 Journal of Testing and Evaluation USA</p> <p>28% similarity</p>	<p>4 Iranian Journal of Civil Engineering and Technology CHE</p> <p>28% similarity</p>
--	--	--	--

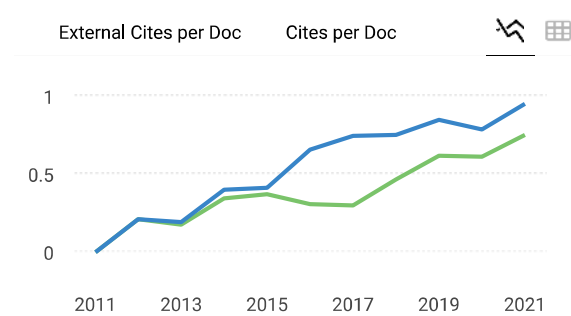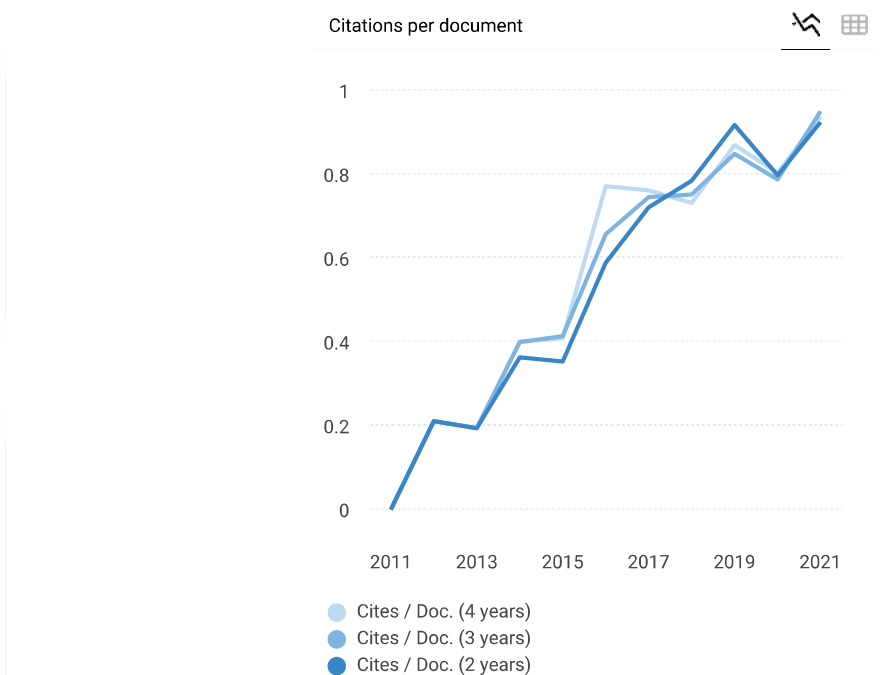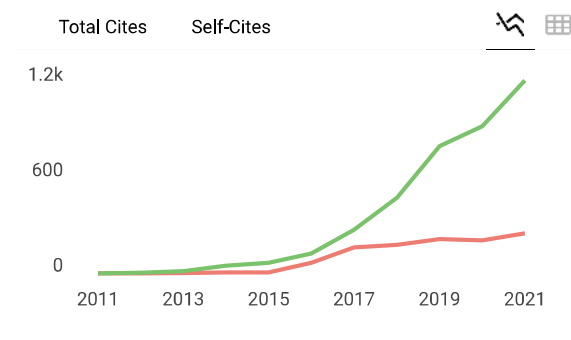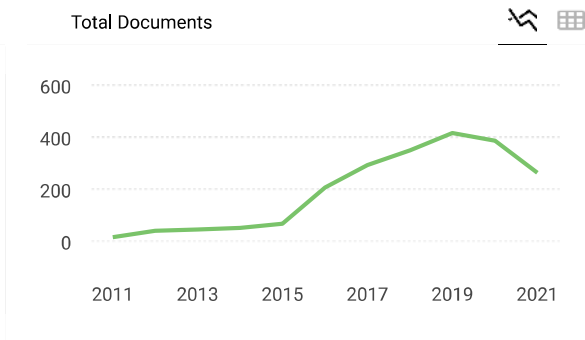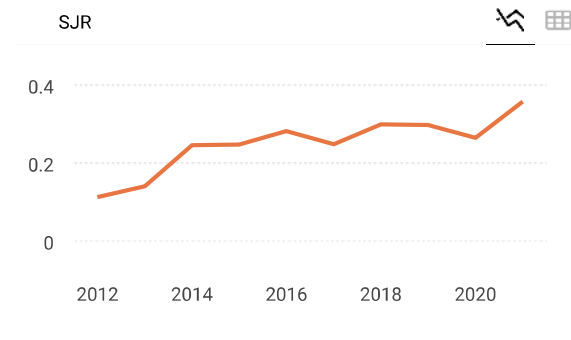

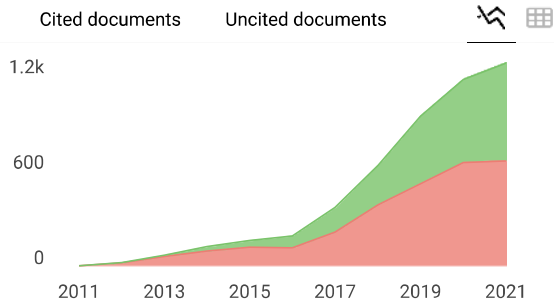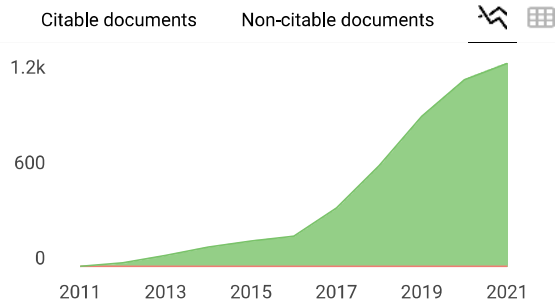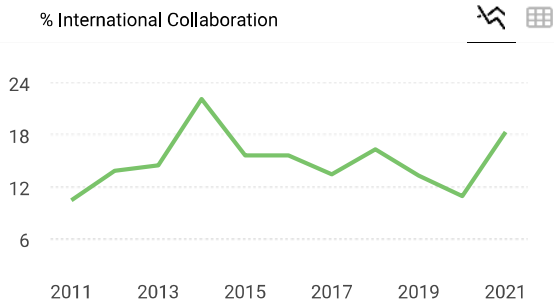

International Journal of GEOMATE

Q3 Building and Construction
best quartile

SJR 2021
0.36

powered by scimagojr.com


← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimaç
```

SCImago Graphica

Explore, visually communicate and make sense of data with our **new data visualization tool.**

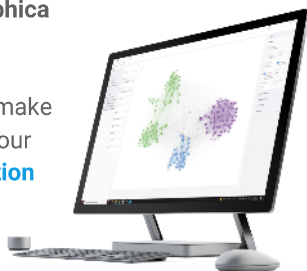

Metrics based on Scopus® data as of April 2022

D **dwikoranto** 1 year ago

Thank you, I started joining to get information about journals.

reply



Melanie Ortiz 1 year ago

SCImago Team

Dear Sir/Madam, welcome and thanks for your participation! Best Regards, SCImago Team

N **nahla salim** 2 years ago

Dear Sir

I would like to publish in Geotechnical branch and I would like to know how long it will take for publishing

Thank you very much

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Nahla,

thank you for contacting us.

Unfortunately, we cannot help you with your request, we suggest you visit the journal's homepage or contact the journal's editorial staff, so they could inform you more deeply.

Best Regards, SCImago Team

S **Suyuti** 2 years ago

Dear Sir/ Madam

My paper was published on the International Journal of GEOMATE, by vol.16 (issue 53), p.32-39, 2019.

But this paper is still not indexed by scopus.
May you help me to make an index in scopus?
Thank you very much for your cooperation.

Best regards.
Suyuti

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Suyuti,
thank you very much for your comment, unfortunately we cannot help you with your request. We suggest you contact Scopus support:
https://service.elsevier.com/app/answers/detail/a_id/14883/kw/scimago/supporthub/scopus/
Best Regards, SCImago Team

A **Aisyah Salimah** 2 years ago

Dear Sir / Madam,

International Journal of GEOMATE coverage 2011-2020. How about next coverage?

Is it still in the Scopus index?

reply



Melanie Ortiz 2 years ago

SCImago Team

Dear Aisyah,
Thank you very much for your comment.
All the metadata have been provided by Scopus /Elsevier in their last update sent to SCImago, including the Coverage's period data. The SJR for 2019 was released on June 2020, 11. We suggest you consult the Scopus database directly to see the current index status as SJR is a static image of Scopus, which is changing every day.
Best Regards, SCImago Team

M **Mohammed Ali Al-Bared** 4 years ago

Thanks a lot for your response

But the thing that i am still wondering is that for year 2016, the category of Building and construction was rated as Q2. Why it changed suddenly? although year 2016 has passed

Thanks again

reply

M **Mohammed Al-Bared** 4 years ago

Dear Sir / Madam,

I published my paper in the International Journal of GEOMATE few months ago and my paper was categorized under Building and construction materials. For year 2017, this category (Building and Construction) was under Quartile 2 in SJR. The rules of my university is to publish in at least Q2 Journals and that is why i selected this journal for my publication. Surprisingly, the Q of the Building and Construction category changed to Q3 although the year 2017 has passed. I really don't understand this sudden change. Can you please clarify this?

Thanks a lot

reply



Elena Corera 4 years ago

SCImago Team

Dear Mohammed Al-Bared,

thank you very much for your participation. According to your question, each year Scopus provides us an update database and, according to that new information, indicators are calculated. Annual data updating can change journal's quartile.

I hope we solve your question.

Best regards,
SCImago Team

Leave a comment

Name

Email

(will not be published)

I'm not a robot
reCAPTCHA
[Privacy](#) - [Terms](#)

Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS
Horatio (Satire 1, 1, 106)

[Edit Cookie Consent](#)

AQUATIC ORGANIC MATTER CHARACTERISTICS AND THMFP OCCURRENCE IN A TROPICAL RIVER

*Mohamad Rangga Sururi^{1,2}, Suprihanto Notodarmojo³ and Dwina Roosmini⁴

¹ Environmental Engineering Program Institut Teknologi Bandung, Post-Graduate Academy, Bandung, Indonesia. ² Departement of Environmental Engineering Institut Teknologi Nasional Bandung, Indonesia. ^{3,4} Departement of Environmental Engineering, Institut Teknologi Bandung, Indonesia

*Corresponding Author, Received: 10 March. 2019, Revised: 19 April. 2019, Accepted: 12 May. 2019

ABSTRACT: Dissolved Organic Matter (DOM) in water sources is reactive to chlorine, forming Trihalomethanes (THMs). However, information on DOM characteristics and Trihalomethanes Forming Potential (THMFP) in tropical surface raw water sources is still limited. This study aimed to determine the characteristics of Total Organic Matter (TOM) and DOM, the correlations between the pair, as well as the correlations between DOM and THMFP during dry and rainy seasons in a polluted tropical river in Indonesia. Samples were collected from Cikapundung River, at the intake of drinking water treatment plant during both seasons. TOM and DOM were measured as COD, DOC, Chromophoric organic (A_{254} , A_{355} , $A_{3/4}$) and Specific Ultra Violet Absorbance (SUVA). Total THMFP (TTHMFP) was determined from CHCl_3 , CHBrCl_2 , CHClBr_2 , and CHBr_3 measurements. Compared to the rainy seasons, the values of all organic parameters at the intake during the dry season were higher. DOM in the dry season was more aromatic, hydrophobic and humic, consistent with higher concentrations of TTHMFP in the dry season ($\bar{X}=636.79\mu\text{g/L}$) than that in the rainy season ($\bar{X}=430.13\mu\text{g/L}$). TOM and DOM correlations for A_{254} , A_{355} , and COD in the dry season were stronger than in the rainy season. Each THMFP species was poorly correlated with any DOM parameters during the dry season, specifically at SUVA level $\geq 5\text{L/mg/m}$. However, there were significant correlations between A_{254} and CHBrCl_2 -FP; A_{355} and CHCl_3 -FP; A_{355} and TTHMFP. These conditions were observed only during the rainy seasons at SUVA of $2\text{-}4\text{L/mg/m}$. Thus, A_{355} can be used as a proxy of TTHMFP during the rainy season in Cikapundung river.

Keywords: Correlation, DOM characteristics, Seasonal variations, THMFP

1. INTRODUCTION

Organic matter is one of the main components in the natural water system and is ubiquitous in water sources as a result of both natural degradation of some organic substances and from human activities [1, 2]. One kind of organic matter in natural waters is Dissolved Organic Matter (DOM), which is defined as the fraction of organic matter that passes membrane filters of $0.1 - 0.7\mu\text{m}$ [3]. DOM existing in raw water for water treatment plant reacts with chlorine, generating Disinfection by Products (DBPs) such as Trihalomethanes (THMs) in drinking water that can pose significant health effects including cancer [4, 5].

Because of the heterogeneity of DOM properties, various surrogate parameters have been used to estimate its reactivity toward DBPs formation [6]. Common parameters to measure DOM in water body include Dissolved Organic Carbon (DOC), and Chromophoric DOM (CDOM). DOC is often synonymous with DOM since organic contaminants in natural systems generally represent a significant fraction of DOC [7], while

CDOM is the fraction of DOM that absorbs Ultraviolet (UV)-Visible light, and is recognized as a controlling factor for the optical properties of surface waters [8]. Previous works also confirmed Specific UV Absorbents (SUVA) or UV absorbance normalized as DOC concentrations is a surrogate parameter of THMs due to its strong correlation with dissolved aromatic of the humic compound and reactive to chlorine [4, 9].

The majority of studies on seasonal changes of NOM were conducted in non-tropical regions. Few studies in tropical regions suggest that the intensity of precipitation may influence the characteristics of NOM in surface water [10]. In a pristine tropical river such as Epulu river (Republic Congo) and Maji ya Chai River (Tanzania), the concentrations of DOC measured during the rainy season were higher than those observed during the dry season [11, 12]. In these studies, the SUVA value and allochthonous humic compounds were high during the rainy season with high precipitation intensity [11, 12]. DOM was also found to be highly correlated with the potential for THMs formation (THMFP) in Bangpakong River, a polluted tropical river in

Thailand [13].

More efforts are still required to investigate the variation in DOM characteristics across seasons and its major role in THMs formation in other tropical regions. In Indonesia, the world's 4th most populated country with a huge demand for drinking water, information of concentrations and characteristics of DOM in its rivers are still limited. This includes, in Cikapundung River, a drinking water source for nearly two million inhabitants in Bandung City as the fifth biggest city in Indonesia. The number of organic matters in Cikapundung River was only determined by measuring the unfiltered water which potentially under-reported the organic matter concentrations [14]. In addition, the raw water quality standard for DOM concentration was not available. Therefore, it is important to characterize DOM fractions and to determine its correlation with Total Organic Matter (TOM). Furthermore, chlorination has been the main disinfection method in drinking water treatment in Indonesia for many years, suggesting the potential of organic matter to generate THMs in source water becomes critical.

The main objectives of this paper were to determine: (i) the characteristics of DOM and TOM ; (ii) the relationships between DOM and TOM; and (iii) the relationships between DOM and THMFP across two different seasons. Considering THMFP measurement is time-consuming and costly, it is expected that the observed relationships between DOM and each THMFP parameter can be used to determine surrogate parameters of THMFP in a polluted tropical river such as Cikapundung River.

To the best of our knowledge, this is the first study in Indonesia that investigates seasonal variations of DOM characteristics and its effect on THMFP conducted in a polluted river which is a representative of drinking water sources for cities in Java Island. Thereby, this study provides science-based information for controlling DOM in surface water and to minimize the formation of THMs in the drinking water.

2. MATERIALS AND METHODS

2.1 Location of Study

Cikapundung River is a tributary of Citarum River that is known as the longest river in Java Island. With a length of 28 km, the river divides the city of Bandung from the north to the south. This river is a typical urban river in a tropical and developing country of Indonesia. The upper stream

flow of Cikapundung River ranges between 500–600L/s of water is extracted for the raw water supply of the city Water Treatment Plant (WTP). The concentrations of organic matters in the Cikapundung river were measured the highest among the other water sources to fulfill drinking water demand for the city of Bandung [15].

The annual average precipitation in this area was 191.54mm, with the highest intensity of rainfall occurs primarily between October to June. The maximum river flow usually occurs in the rainy seasons of 7.59m³/s while the lowest occur in the dry season of 0.54m³/s. Land use in the upper basin mainly comprises mixed anthropogenic area (80%), including farming, agriculture, wetlands, commercials, and residential areas. The remaining areas are occupied by forest area of 19% of the total catchment area (6,933.3Ha) (Fig.1), and the intake was located in this natural area (National Park of Djuanda). Among other rivers used as raw water sources for the city WTP, Cikapundung river has the worst water quality due to its high concentrations of organic matters originated from anthropogenic activities [15].

The main sampling site (point-1) was located at the Bantar Awi intake of drinking WTP (S 6°51'33,1'', E 107°38,57'57,1''). In addition, one reference site was located at the upstream of Cikapundung River of about 7 km from the intake at the upper stream part ((S 6°50'19.12'', E 107°43'35.52'') (point-2)). This reference site was surrounded by natural forestry and was used to identify potential contaminations in the area prior to the location of point-2. The study area and the selected sampling sites are illustrated in Fig.1.

2.2 Sampling and Analytical Methods

All samples were collected through grab sampling during both rainy and dry seasons. The study consist of two sub-studies: substudy-1 focused on the TOM and DOM characterization and TOM and DOM relationships, while the substudy-2 was conducted to determine DOM and THMFP relationships. In substudy-1, DOM and TOM concentrations and characteristics were measured from the samples collected in the dry season (14 – 23 August 2017, period 1), and two periods in the rainy season: period 1 (27 Jan – 13 Feb 2017) and period 2 (9 – 17 November 2017). Following, the DOM and THMFP samples were collected during the dry season (14 – 23 August 2017) and two periods in the rainy season: period 2 (9 – 17 November 2017 and period 3 (8 – 14 Feb 2018).

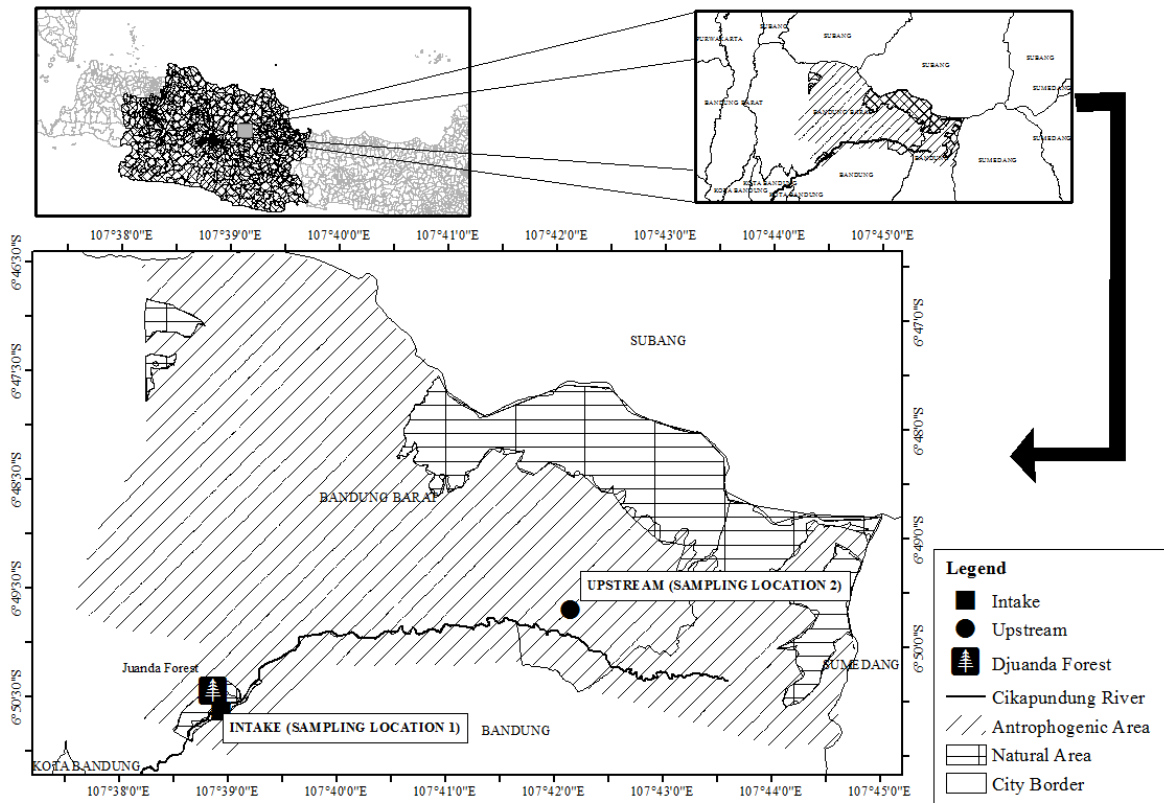


Fig.1 Study area and distribution of water sampling sites in Cikapundung River. The circle represents the sampling site at the upstream (point 2). The square represents the sampling site at the intake (point 1).

Samples at the upstream (point-2) were only collected during the rainy season period-1 due to limited availability of sampling equipment. Samples were placed in a 5L-polyethylene bottle, shipped in a cooled container and stored in a refrigerator at 4°C prior to analysis. Samples were prepared and analyzed in the Environmental Engineering Laboratory of Institut Teknologi Bandung and Integrated Laboratory of Politeknik Kesehatan Bandung. Measurement of pH and water temperature was carried out on-site during the sampling.

The characteristics of DOM were identified as Chemical Oxygen Demand (COD), DOC, and CDOM which were measured as UV absorbance at wavelength of 254 nm (A_{254}), UV absorbance at wavelength of 355 nm (A_{355}), ratio between A_{300} and A_{400} ($A_{3/4}$), and ratio of absorbance at 254 to the concentrations of DOC (SUVA). A_{254} indicates humic and aromatic compounds in water, while A_{355} describes CDOM derived from terrestrial [16], and a ratio between A_{300} and A_{400} ($A_{3/4}$) was measured to show the proportion of humic and fulvic acid [17]. DOC, A_{254} , and SUVA are surrogate parameters for THMFP in the alternative disinfectants and oxidants guidance manual [4]. While COD is listed in Indonesia standard for raw water quality (Government Regulation 82/2001), thus it is the most common parameter of NOM in

raw water, measured by the water company in Indonesia. Other considerations that these parameters are easy to measure, relatively do not time-consuming, and cheaper than THMFP measurements.

These parameters were analyzed in both filtered (DOM) and unfiltered (TOM) samples. To obtain filtered samples, samples were passed through 0,45µm membrane prior to analysis. COD was analyzed based on the Standard Method protocol 5220C (close reflux method) [18]. Before reuse, glassware was cleaned first and heated at 450°C in the muffle furnace for 4 hours. The concentrations of DOC were measured using TOC Analyzer SIEVER Innovox 0545 with a high temperature of combustion, following the Standard methods 3510 B [18]. CDOM parameters were measured using a spectrophotometer (Shimadzu-1700 UV/Vis with a 1-cm quartz cell).

The potential of THMs formation in the filtered samples was measured according to the Standard Method 5710B [18]. The method included the addition of NaOCl and phosphate buffer for adjusting the pH of samples to be at 7, chlorinating samples with excess free chlorine, and incubating samples for 7 days at 25°C. The extraction of THMs was conducted based on USEPA 551.1 standard protocol (Liquid-liquid extraction by n-pentane). The extract was then analyzed by gas

chromatography (GC 7890 A Agilent) and mass spectrophotometry (MS 5975 C). Standard Method 6232B was used for measurement using GC MS with splitless injection. THMs mixed Standard (Supelco /Sigma–Aldrich Co., USA) comprised of chloroform (CHCl₃), bromodichloromethane (CHBrCl₂), and dibromochloromethane (CHClBr₂), bromoform (CHBr₃) was used in this study.

3. RESULTS AND DISCUSSION

3.1 NOM Characteristics

The characteristics of water samples which include COD, A₂₅₄, A₃₅₅, A_{3/4}, DOC, and SUVA were taken at point-1 and point-2 and the results are presented in Table 1 and 2, respectively. During each sampling period, the measured temperature of water samples ranged between 23 and 25°C, and pH values were in a neutral range (6.7-7.1).

The measured average of DOM-COD and DOC levels at the point-2 (DOM-COD= 3.87mg/L; DOC=3.54mg/L) were lower than those

measured at the point-1 (DOM-COD= 19.94mg/L; DOC=6.56mg/L) during the rainy period 1 (Table 1). The national standard for the quality of raw water sources in Indonesia does not regulate organic parameters except for COD. It was found that COD average concentration at the point-1 in dry and rainy seasons was above the national standard (10mg/L). One of the possible reasons was because the land use around the point-2 was dominated by natural forest, while the intake was surrounded by anthropogenic activities such as households, agricultural, and cow husbandry (within 7km) (see Fig. 1).

Higher concentrations of DOM-COD at the point-1 were potentially attributable to the direct discharges of cow manures biogas residues into the stream and domestic activities around the catchment. This comparison showed a logical fact that the catchments with more forests and less anthropogenic activities have better water quality in term of oxidizable pollutants and dissolved carbon.

Table 1 The characteristics of water samples from the point-1 in dry and rainy seasons

Parameters	Season					
	Dry (N = 9)		Rainy periode-1 (N = 9)		Rainy periode-2 (N = 9)	
	range	\bar{X}	range	\bar{X}	range	\bar{X}
TOM-COD(mg/L)	19.20-60.8	45.16	20.60-38.40	28.96	19.20-30.00	26.18
DOM-COD(mg/L)	13.60-38.4	25.18	13.60-27.70	19.94	11.20-30.00	19.12
TOM-A ₂₅₄ (cm ⁻¹)	0.35-0.58	0.43	0.25-0.38	0.31	0.35-0.58	0.43
DOM-A ₂₅₄ (cm ⁻¹)	0.21-0.48	0.35	0.15-0.22	0.19	0.06-0.26	0.19
TOM-A ₃₅₅ (cm ⁻¹)	0.11-0.39	0.24	0.11-0.26	0.18	0.08-0.22	0.13
DOM-A ₃₅₅ (cm ⁻¹)	0.08-0.35	0.18	0.03-0.06	0.05	0.05-0.13	0.08
TOM-A _{3/4}	1.20-2.21	1.66	1.18-2.56	1.77	0.71-1.79	1.27
DOM-A _{3/4}	1.70-2.80	2.23	2.60-4.30	3.47	1.15-2.94	2.28
DOC(mg/L)	4.26-8.66	6.98	4.20-9.35	6.56	3.02-5.50	4.36
SUVA(L/mg/m)	2.70-9.84	5.7	1.67-4.07	2.86	1.81-5.80	4.32

Table 2 The characteristics of water samples from the point-2 in the rainy season period 1 (N=9)

Parameters	Range	\bar{X}
DOM-COD(mg/L)	3.80-4.00	3.87
DOM-A ₂₅₄ (cm ⁻¹)	0.13-0.19	0.15
DOM-A ₃₅₅ (cm ⁻¹)	0.09-0.14	0.11
DOM-A _{3/4}	1.14-1.25	1.18
DOC(mg/L)	2.81-4.00	3.54
SUVA(L/mg/m)	3.45-5.16	4.18

The average level of A₃₅₅ at point-2 (0.11cm⁻¹) during the rainy season was larger than that measured for point-1 (0.05cm⁻¹), indicating DOM in the upstream area may be predominantly contributed by the natural decomposition of plants such as lignin [19]. Lignin is a very complex organic compound and mostly consists of aromatic compounds [20]. Although DOM at the point-1 was richer in oxidizable pollutants and dissolved carbon, the changes in A₂₅₄ levels in both locations were not significant. The results indicated the anthropogenic activities during the rainy season along the water body between the two points did

not contribute significantly to chromophoric organic. Compared to other studies of tropical rivers such as in Maji ya Chai river, Tanzania [11] and Central Kalimantan peat water [21], the measured A_{254} values taken from the intake were considered low. The higher level of A_{254} in Maji ya Chai river and peat water in central Kalimantan was due to the contribution of humic substances originated from natural sources of NOM. In addition, higher SUVA (>4 L/mg/m) and the lower level of measured aromatization ratio ($A_{3/4}$) (<5) values at the point-2 than those at the point-1 indicated DOM in the upstream was dominated by humic acids and hydrophobic substances. Compared to other studies, DOM- A_{355} values at the point-1 were within the range of those reported in Xiaqing River (0.04 – 0.17 cm^{-1}) [22], but lower than those reported in the estuary (average of 0.06 cm^{-1}) [23] and lake water body (0.004 – 0.013 cm^{-1}) which have a higher load of organic matter originated from natural sources [24].

DOM characteristics and concentrations in natural water can vary seasonally. In this study, seasonal variations in the measured values of COD, A_{254} , A_{355} , $A_{3/4}$, DOC, and SUVA were observed in both TOM and DOM samples, with the highest average values occurred in the dry season (Table 1). The lower values of these parameters during the rainy season were not expected, considering greater entry of allochthonous/terrestrial materials through surface runoff may occur in the rainy season [11, 12]. Seasonal changes of river flow might explain the concentrations and characteristics differences over seasons. According to the Meteorology and Geophysics Agency, the average monthly rainfall intensity during the dry season (August 2017) was only 48.4 mm, with a total of six rainy-days observed only during the month. The rainfall intensity during rainy season period 1 range between 65.3mm-199.3mm, reached 442.2mm during period 2 with total rainy-days at least 23 days/month of during the time course (January-February 2017; and November 2017). Therefore, there was a potentially less dilution effect from the rainwater in the river during the dry season. On the other hand, organic matters from nearby anthropogenic sources were consistently discharged into the stream throughout the year. This continuous entry of organic matters from anthropogenic activities throughout the year coincidence with the minimum flow of Cikapundung river during the dry season may result in higher DOM level in this season.

SUVA values correspond to the nature or characteristics of organic matters, providing a quantitative measure of aromatic and hydrophobic fractions of the DOM in water [25]. Higher average values of SUVA (>5 mg/L) as well as

TOM- A_{254} (0.43 cm^{-1}) and DOM- A_{254} (0.35 cm^{-1}) during the dry season, suggesting domination of aromatic and hydrophobic compounds to DOM during the dry season than those during the rainy season. The majority of hydrophobic compounds was acidic compounds such as fulvic and humic acids originated from both natural decompositions of lignin and anthropogenic activities [25]. A further measurement such as through Fluorescence Excitation-Emission Matrix is needed to confirm the origin of DOM [26]. Along with the results for SUVA and A_{254} , $A_{3/4}$ ratio values across dry and rainy seasons were observed <5 . Thus it enhances the finding that humic acid compounds were more dominant than fulvic acid compounds, as reported by Artinger [2000] that $A_{3/4} < 5$ indicates higher concentrations of aromatic and humic acid compounds in the water.

3.2 The relationships between TOM and DOM

Fig. 2 A-B shows a relationship between TOM- and DOM- A_{254} ($R=0.78$; $p=0.01$), as well as - A_{355} ($R=0.75$; $p=0.02$) during the dry season. TOM-COD was well correlated with DOM-COD in this season ($R=0.72$; $p=0.03$), as seen in Fig. 2 C.

For the rainy season, the relationships between TOM and DOM for all parameters were weaker (Fig. 2). This was because TOM of the rainy season was possibly dominated by terrestrial particulate organic matter carried by the runoff. Yet, TOM of the dry season was composed of DOM predominantly rather than particulate organic matter. As seen in Table 1, the proportions of CDOM in Chromophoric-TOM (CTOM) in the rainy season were smaller than that in the dry season ($\text{CDOM}/\text{CTOM} = 49$ - 66% in the rainy; 73 - 82% in the dry season). It can be suggested that for the dry season, the level of DOM can be predicted solely based on the measurement of TOM. However, both TOM and DOM should be measured during the rainy season as they were not well correlated.

3.3 DOM and THMFP relationships

The measured total forming potential and forming potential of each THM compound across three different sampling periods are summarized in Table 3. The table shows, the formation of CHCl_3 -FP was the highest, followed by CHBrCl_2 -FP. However, the CHClBr_2 -FP and CHBr_3 -FP were detected below the Detection Limit (DL). Both CHCl_3 and CHBrCl_2 were the most common THMs species detected in tropical water [13, 27].

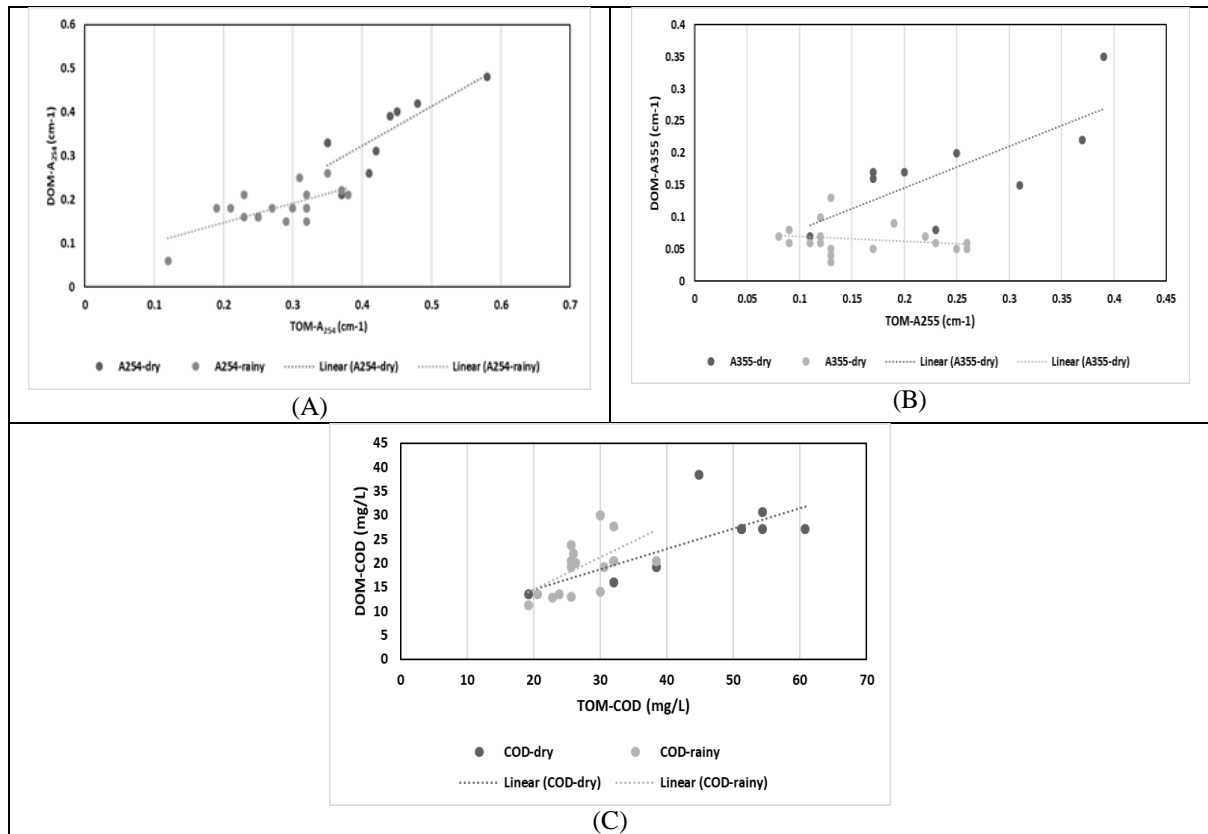


Fig.2 The relationships between TOM and DOM during dry and rainy seasons: (A) TOM-A₂₅₄ and BOM-A₂₅₄; (B) TOM-A₃₅₅ and BOM-A₃₅₅; (C) TOM-COD and DOM-COD

Table 3. THMFP concentrations (µg/L) during dry rainy and rainy seasons period 2-3 at point-1

Parameters	Ranges	\bar{X}
CHBrCl₂-FP		
Dry	14.43-97.93	66.87
Rainy	<DL-120.00	33.57
CHCl₃-FP		
Dry	140.00-937.39	568.63
Rainy	110.00-859.98	405.69
TTHMFP		
Dry	154.43-1021.88	636.79
Rainy	100.00-867.26	430.13

Furthermore, the results indicated that CHCl₃-FP was the predominant species of THM in the water samples, consistent with those reported in both tropical and sub-tropical rivers [9, 13, 28-32]. Seasonal variations were also observed for the occurrence of THMFP. The average concentrations

of total THMFP, CHCl₃-FP, and CHBrCl₂-FP during the dry season were higher than those during the rainy season (Table 3).

SUVA is generally known as the major precursors to the formation of disinfection by-products [4]. Hence a higher SUVA should increase THMFP level [33, 34]. In this study, during dry season however, poor correlations were observed between DOM enriched with aromatic and hydrophobic than hydrophilic compounds (SUVA > 5L/mg/m) and TTHMFP (with a Pearson's correlation (R) of -0.37 and p-value of >0.05), CHCl₃-FP (R of -0.37 and p-value of 0.05), and CHBrCl₂-FP (R of -0.28 and p-value of >0.05). This indicated the presence of non-reactive aromatic compounds which were originated from anthropogenic activities near the intake area of Cikapundung River. Previous studies demonstrated that for water samples with high SUVA level, not all aromatic fraction reacted with chlorine to form THMs [35]. Similar results were also found in a shrimp farm contaminated by fertilizers with SUVA value above 5L/mg/m [13]. Accordingly, SUVA > 5L/mg/m tends to be a poor indicator for THMFP and measured DOM parameters

relationship in a polluted water body with a high level of aromatic and hydrophobic compounds as also found in Cikapundung River.

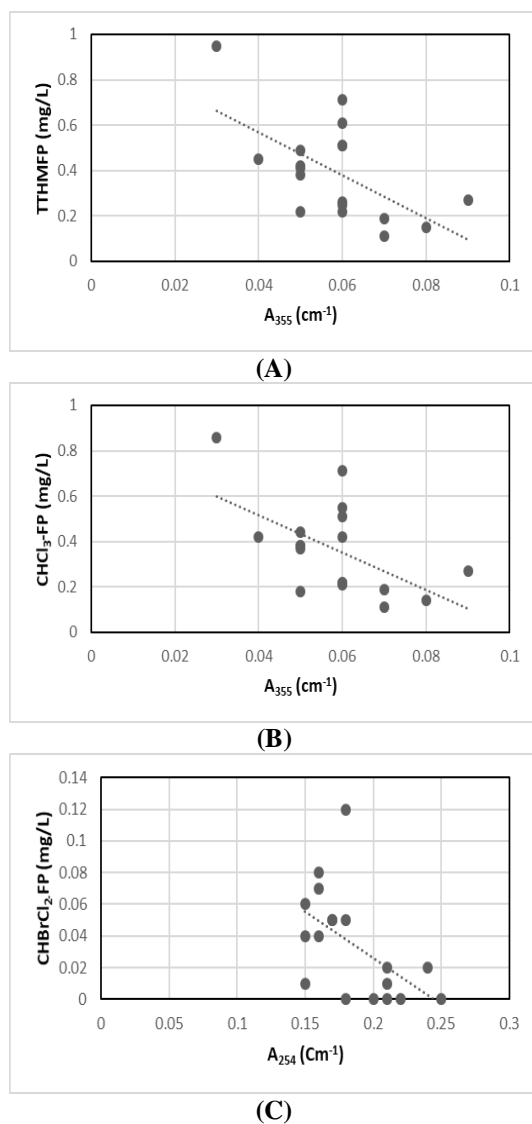


Fig. 3 The relationships between DOM and THMFP during rainy seasons: (A) A_{355} and TTHMFP; (B) A_{355} and $\text{CHCl}_3\text{-FP}$; (C) A_{254} and $\text{CHBrCl}_2\text{-FP}$

The value of DOM during the rainy season indicated balance proportion of aromatic and non-aromatic as well as balance proportion of hydrophobic and hydrophilic compounds, which was consistent with SUVA values in the range of 2–4L/mg/m. Significant correlations ($p < 0.05$) were found between A_{355} and $\text{CHCl}_3\text{-FP}$ and TTHMFP, A_{254} , and $\text{CHBrCl}_2\text{-FP}$ during the rainy season (Fig.3). This suggests the aromatic compounds reactive to chlorine and bromine in water samples when SUVA values ranged from 2 to 4L/mg/m

[33]. Significant correlations between CDOM and THMFP during the rainy season were also reported in a river surrounded by anthropogenic activities [36] and in a river with high flow rates [35], similar with those observed in Cikapundung River during the rainy season. The results may confirm terrestrial DOM was an important precursor of THMs in that season. Therefore, A_{355} can be used as a surrogate parameter during the rainy season in the Cikapundung river and other tropical polluted rivers with similar environmental conditions. The findings are of great importance and concern since THMFP measurement is costly and timely.

4. CONCLUSIONS

This study showed that the highest levels of all organic parameters in the Cikapundung river occurred during the dry season. In this season, good relationships between TOM and DOM indicated the level of DOM can be predicted based on the measurement of TOM. DOM of dry season comprised a larger proportion of aromatic and hydrophobic compounds at SUVA levels $> 5\text{L/mg/m}$. However, DOM parameters were poorly correlated with THMFP species which possibly because not all aromatic fraction reacted with chlorine to form THMs. Thus SUVA at levels above 5L/mg/m can be used as an indicator of poor relationships between DOM and THMFP.

DOM during the rainy season comprised balance proportion of aromatic and non-aromatic as well as hydrophobic and hydrophilic compounds (SUVA of 2–4L/mg/m). In this condition, a significant correlation between A_{355} and TTHMFP; A_{355} and $\text{CHCl}_3\text{-FP}$; and A_{254} and $\text{CHBrCl}_2\text{-FP}$ were observed. Therefore, terrestrial DOM (A_{355}) was concluded as an important precursor of THMs and A_{355} can be used as a surrogate parameter to control THMFP during the rainy season. This may help to replace THMFP measurement with A_{355} measurement to avoid the high cost and time-consuming measurement.

5. ACKNOWLEDGMENTS

This study was funded by Riset Kelompok Keahlian Unggulan Grant in 2017 from LPPM ITB. The author acknowledges PDAM Tirtawening for the permit to conduct the study at Bantar Awi Intake.

6. REFERENCES

- [1] Filella, M., 2009, Freshwaters: which NOM matters? Environmental chemistry letters, 2009. 7(1): p. 21-35. DOI: 10.1007/s10311-008-0158-x.

- [2] Frimmel, F.H., 2005, Aquatic humic substances. *Biopolymers Online*, 2005. DOI: 10.1002/3527600035.bpol1010.
- [3] Mostofa, K.M., C.-q. Liu, M.A. Mottaleb, G. Wan, H. Ogawa, D. Vione, T. Yoshioka, and F. Wu, Dissolved organic matter in natural waters, in *Photobiogeochemistry of Organic Matter*. 2013, Springer. p. 1-137.
- [4] USEPA, J., *Alternative disinfectants and oxidants guidance manual*. 1999, 1999.
- [5] WHO, *Trihalomethanes in Drinking-water*. 2004, WHO/SDE/WSH/03.04/64.
- [6] Hua, G., D.A. Reckhow, and I. Abusallout, 2015, Correlation between SUVA and DBP formation during chlorination and chloramination of NOM fractions from different sources. *Chemosphere*, 2015. 130: p. 82-89. DOI: 10.1016/j.chemosphere.2015.03.039.
- [7] Leehneer, J. and J. Croué, 2003, Characterizing dissolved aquatic organic matter. *Environmental Science & Technology*, 2003. 1: p. 19-26.
- [8] Green, S.A. and N.V. Blough, 1994, Optical absorption and fluorescence properties of chromophoric dissolved organic matter in natural waters. *Limnology and Oceanography*, 1994. 39(8): p. 1903-1916.
- [9] Reckhow, D.A., P.C. Singer, and R.L. Malcolm, 1990, Chlorination of humic materials: byproduct formation and chemical interpretations. *Environmental science & technology*, 1990. 24(11): p. 1655-1664. DOI: 10.1021/es00081a005.
- [10] Vasyukova, E., W. Uhl, F. Braga, C. Simoes, T. Baylão, and K. Neder, 2012, Drinking water production from surface water sources in the tropics: Brasília DF, Brazil. *Environmental Earth Sciences*, 2012. 65(5): p. 1587-1599.
- [11] Aschermann, G., A. Jeihanipour, J. Shen, G. Mkongo, L. Dramas, J.-P. Croué, and A. Schäfer, 2016, Seasonal variation of organic matter concentration and characteristics in the Maji ya Chai River (Tanzania): Impact on treatability by ultrafiltration. *Water research*, 2016. 101: p. 370-381. DOI: 10.1016/j.watres.2016.05.022.
- [12] Spencer, R.G., P.J. Hernes, R. Ruf, A. Baker, R.Y. Dyda, A. Stubbins, and J. Six, 2010, Temporal controls on dissolved organic matter and lignin biogeochemistry in a pristine tropical river, Democratic Republic of Congo. *Journal of Geophysical Research: Biogeosciences*, 2010. 115(G3). DOI: 10.1029/2009JG001180.
- [13] Marhaba, T.F., A. Mangmeechai, C. Chaiwatpongsakorn, and P. Pavasant, 2006, Trihalomethanes formation potential of shrimp farm effluents. *Journal of hazardous materials*, 2006. 136(2): p. 151-163.
- [14] Aiken, G., L.A. Kaplan, and J. Weishaar, 2002, Assessment of relative accuracy in the determination of organic matter concentrations in aquatic systems. *Journal of Environmental Monitoring*, 2002. 4(1): p. 70-74.
- [15] Sururi, M.R., D. Roosmini, and S. Notodarmojo. Chromophoric and liability quantification of organic matters in the polluted rivers of Bandung watershed, Indonesia. in *MATEC Web of Conferences*. 2018. EDP Sciences. DOI: 10.1051/mateconf/201815402002
- [16] Dainard, P.G. and C. Guéguen, 2013, Distribution of PARAFAC modeled CDOM components in the North Pacific Ocean, Bering, Chukchi and Beaufort seas. *Marine Chemistry*, 2013. 157: p. 216-223. DOI: 10.1016/j.marchem.2013.10.007.
- [17] Artinger, R., G. Buckau, S. Geyer, P. Fritz, M. Wolf, and J. Kim, 2000, Characterization of groundwater humic substances: influence of sedimentary organic carbon. *Applied Geochemistry*, 2000. 15(1): p. 97-116. DOI: 10.1016/S0883-2927(99)00021-9.
- [18] APHA, 2005, *Standard methods for the examination of water and wastewater*. American Public Health Association (APHA): Washington, DC, USA, 2005.
- [19] Boyle, E.S., N. Guerriero, A. Thiallet, R.D. Vecchio, and N.V. Blough, 2009, Optical properties of humic substances and CDOM: relation to structure. *Environmental science & technology*, 2009. 43(7): p. 2262-2268.
- [20] Kalbitz, K., D. Schwesig, J. Schmerwitz, K. Kaiser, L. Haumaier, B. Glaser, R. Ellerbrock, and P. Leinweber, 2003, Changes in properties of soil-derived dissolved organic matter induced by biodegradation. *Soil Biology and Biochemistry*, 2003. 35(8): p. 1129-1142.
- [21] Notodarmojo, S., Mahmud, and A. Larasati, 2017, Adsorption of natural organic matter (nom) in peat water by local Indonesia tropical clay soils. *International Journal Of Geomate*, 2017. 13(38): p. 111-119.

- [22] Jiang, T., U. Skjellberg, E. Björn, N.W. Green, J. Tang, D. Wang, J. Gao, and C. Li, 2017, Characteristics of dissolved organic matter (DOM) and relationship with dissolved mercury in Xiaoqing River-Laizhou Bay estuary, Bohai Sea, China. *Environmental pollution*, 2017. 223: p. 19-30.
- [23] Zhang, Y., M.A. van Dijk, M. Liu, G. Zhu, and B. Qin, 2009, The contribution of phytoplankton degradation to chromophoric dissolved organic matter (CDOM) in eutrophic shallow lakes: field and experimental evidence. *water research*, 2009. 43(18): p. 4685-4697.
- [24] Wang, Y., D. Zhang, Z. Shen, J. Chen, and C. Feng, 2014, Characterization and spacial distribution variability of chromophoric dissolved organic matter (CDOM) in the Yangtze Estuary. *Chemosphere*, 2014. 95: p. 353-362.
- [25] White, M.C., J.D. Thompson, G.W. Harrington, and P.C. Singer, 1997, Evaluating criteria for enhanced coagulation compliance. *American Water Works Association. Journal*, 1997. 89(5): p. 64.
- [26] McKnight, D.M., E.W. Boyer, P.K. Westerhoff, P.T. Doran, T. Kulbe, and D.T. Andersen, 2001, Spectrofluorometric characterization of dissolved organic matter for indication of precursor organic material and aromaticity. *Limnology and Oceanography*, 2001. 46(1): p. 38-48. DOI: 10.4319/lo.2001.46.1.0038.
- [27] Amarasooriya, A., S. Weragoda, M. Makehelwala, and R. Weerasooriya, 2018, Occurrence of trihalomethane in relation to treatment technologies and water quality under tropical conditions. *H2Open Journal*, 2018. 1(1): p. 69-83.
- [28] Summerhayes, R.J., G.G. Morgan, D. Lincoln, H.P. Edwards, A. Earnest, M.B. Rahman, P. Byleveld, C.T. Cowie, and J.R. Beard, 2011, Spatio-temporal variation in trihalomethanes in New South Wales. *Water research*, 2011. 45(17): p. 5715-5726.
- [29] Hua, B., R. Mu, H. Shi, E. Inniss, and J. Yang, 2016, Water Quality in Selected Small Drinking Water Systems of Missouri Rural Communities. *Beverages*, 2016. 2(2): p. 10.
- [30] Krasner, S.W., M.J. McGuire, J.G. Jacangelo, N.L. Patania, K.M. Reagan, and E.M. Aieta, 1989, The occurrence of disinfection by-products in US drinking water. *Journal-American Water Works Association*, 1989. 81(8): p. 41-53.
- [31] Ates, N., S.S. Kaplan, E. Sahinkaya, M. Kitis, F.B. Dilek, and U. Yetis, 2007, Occurrence of disinfection by-products in low DOC surface waters in Turkey. *Journal of hazardous materials*, 2007. 142(1): p. 526-534. DOI: 10.1016/j.jhazmat.2006.08.076.
- [32] Panyapinyopol, B., T.F. Marhaba, V. Kanokkantapong, and P. Pavasant, 2005, Characterization of precursors to trihalomethanes formation in Bangkok source water. *Journal of Hazardous Materials*, 2005. 120(1-3): p. 229-236.
- [33] Kitis, M., T. Karanfil, A. Wigton, and J.E. Kilduff, 2002, Probing reactivity of dissolved organic matter for disinfection by-product formation using XAD-8 resin adsorption and ultrafiltration fractionation. *Water research*, 2002. 36(15): p. 3834-3848.
- [34] Ma, D.F., B.Y. Gao, S.L. Sun, Y. Wang, Q.Y. Yue, and Q. Li, 2013, Effects of dissolved organic matter size fractions on trihalomethanes formation in MBR effluents during chlorine disinfection. *Bioresource Technology*, 2013. 136: p. 535-541. DOI: 10.1016/j.biortech.2013.03.002.
- [35] Fram, M.S., R. Fujii, J.L. Weishaar, B.A. Bergamaschi, and G.R. Aiken, 1999, How DOC composition may explain the poor correlation between specific trihalomethane formation potential and specific UV absorbance. *Water Resources Investigations Report: WRI*, 1999: p. 99-4018.
- [36] Hur, J., H.V.-M. Nguyen, and B.-M. Lee, 2014, Influence of upstream land use on dissolved organic matter and trihalomethane formation potential in watersheds for two different seasons. *Environmental Science and Pollution Research*, 2014. 21(12): p. 7489-7500.